

Design of Fixture For Front End Cover of Pump

Mr. Javed Gulab Mulla¹, Ms. Gawali Rutuja Balaji², Mr. Bagale Jatingaraya Gangaram³,
Mr. Koli Akash Revappa⁴ and Mr. Bharale Swapnil Ramchandra⁵

¹Lecturer, Dept of M.E.(Manufacturing process)

^{1, 2, 3, 4, 5} A. G. Patil Ploytechnic Institute, Solapur, Maharastra, India.

Abstract- Designing is very important activity in engineering field. In this paper fixture assembly is designed for the Front End Cover of Pump. We got sponsored project for our final year diploma mechanical engineering students from Leena Engineering, Solapur. We created three dimension and two dimension of fixture assembly in AutoCad2010 software. Dimension of the parts for the assembly are taken on the basis of casting weight and cutting forces generated during actual machining and by referring other fixtures of similar jobs. Selection of material is done as per standard.

Keywords- Fixture, Location, Work piece , AutoCad

I. INTRODUCTION

A fixture is a work-holding or support device used in the manufacturing industry. Fixtures are used to securely locate and support the work, ensuring that all parts produced using the fixture will maintain conformity and interchangeability. Using a fixture improves the economy of production by allowing smooth operation and quick transition from part to part, reducing the requirement for skilled labor by simplifying how work pieces are mounted, and increasing conformity across a production run. A fixture differs from a jig in that when a fixture is used, the tool must move relative to the work piece, a jig moves the piece while the tool remains stationary[1].

II. TYPES OF FIXTURE

Though fixtures are predominantly used in milling operation it is used in other operations like turning, boring, welding and grinding. Fixtures are also made for inspection and assembly works. Moreover fixtures are used for castings and forgings which are rough and irregular in shape. With the use of locators and proper clamps, handling of those jobs will be made easy in fixtures than any other standard work holding devices[2].

A. Adjustable fixture-An adjustable fixture is one which is used in lathe where different cutting tools could be accommodated in one set up, to turn work pieces of different shape and length. The position of the cutting tool is adjusted by different gages.

- B. Grinding fixtures-When extreme accuracy is required for grinding parts like connecting rods, valve faces or bevel gears, grinding fixtures are used and they hold parts without any distortion. The positioning of the parts in the fixture is very important and the clamping should be designed to cover the parts for which machining is not required.
- C. Welding fixture-Welding fixtures are used to hold the parts in the required shape and are used from smaller parts to larger parts of a plane. Before welding the parts are placed and positioned for the required shape. After clamping the parts welding work will be carried out.
- D. Assembly fixture-Large components in airplanes are usually assembled with assembly fixtures. Pipelines and other frames which are so lengthy will be placed in the fixture and assembled. As the use of fixture will be more with lengthy or large components the fixture material has to be stiffer to avoid deflection. Some parts are required to have simple operations like drilling or welding, after aligning with the adjacent parts. An assembly fixture should have to be constructed to accommodate such situations.
- E. Inspection fixture-The parts after getting finished with the manufacturing operation have to be checked for its accuracy in shape or in dimension. That will be performed with inspection fixtures and they are extensively used in automotive industries. The fixture will be the master in shape and every part will be compared for its shape conformity. For checking the dimension, the fixture is prepared in such a way that it could accommodate the correct dimensioned parts only.
- F. Milling fixture- The use of fixture is oriented mostly with milling operation and there are different types of fixtures available with milling operation.
- G. Reciprocating fixture- In a reciprocating milling fixture twin fixtures are mounted on a sliding table with its base fastened to the milling machine. It facilitates the operator to unload or reload one work piece while the other one will be under machining by moving the sliding table in a straight line. The table movement will be achieved either by compressed air or hydraulic fluid.
- H. Indexing fixture- When the milling operation is required to fall on a circular path indexing fixtures are used. For milling gears indexing fixtures are used. With multiple

indexing head more than one job can be milled at the same time.

- I. Straddle milling fixture- Straddle milling fixture is used where milling operation is required simultaneously on either side of a component. This assures the parallelism of the component. Also in taking heavy cuts during the roughing operation two components could be loaded so that this set up will save time.
- J. Form milling fixture-For milling ordinary contours like taking a slot or milling a side of a plate form milling fixture is used. More than one component will be fixed in a row and the operation could be done in a single stroke. The work should always be secured in such a way the thrust of the cutter is taken by the solid part of the fixture.
- K. Multiple milling fixture- When milling two or more surfaces of a same part which are in relation with each other multiple head fixture are used. This is one type of the special milling fixtures and is used in machining two cylinder faces of a V-engine cylinder block at a same time thereby saving more production time.

Fixtures must always be designed with economics in mind, the purpose of these devices is to reduce costs, and so they must be designed in such a way that the cost reduction outweighs the cost of implementing the fixture. It is usually better, from an economic standpoint, for a fixture to result in a small cost reduction for a process in constant use, than for a large cost reduction for a process used only occasionally.

Most fixtures have a solid component, affixed to the floor or to the body of the machine and considered immovable relative to the motion of the machining bit, and one or more movable components known as clamps. These clamps (which may be operated by many different mechanical means) allow work pieces to be easily placed in the machine or removed, and yet stay secure during operation. Many are also adjustable, allowing for work pieces of different sizes to be used for different operations. Fixtures must be designed such that the pressure or motion of the machining operation (usually known as the feed) is directed primarily against the solid component of the fixture. This reduces the likelihood that the fixture will fail, interrupting the operation and potentially causing damage to infrastructure, components, or operators[3].

Fixtures may also be designed for very general or simple uses. These multi-use fixtures tend to be very simple themselves, often relying on the precision and ingenuity of the operator, as well as surfaces and components already present in the workshop, to provide the same benefits of a specially-designed fixture. Examples include workshop vises, adjustable clamps, and improvised devices such as weights and furniture. Each component of a fixture is designed for one of two

purposes: location or support. Following are the basic points, which are required to be considered while designing the manufacturing fixture[4],

- A. Make your manufacturing fixture simple. Simple means less cost to maintain and less opportunity to break.
- B. Make it easy to use. They should not slow people down.
- C. Make it have a purpose. Don't fixture something just to have a fixture. Make sure there is a problem you are solving.
- D. Make your manufacturing fixture as cheaply as possible.
- E. Make it 'strong enough'.
- F. Make your manufacturing fixture as precise as required. In a manufacturing fixture, precision might be needed for alignment. In another, it may not be. Make sure the precision of your device matches the need. Precision costs money.
- G. Be creative on where to use it. For example, you can build a manufacturing fixture into a transport cart.
- H. Build in reference points in your fixture. Account for variance in the system-uneven floors, varying air pressure in wheels, and variation in carts, for example, might make a part on a cart and an installation fixture hard to match up. If the fixture grabs onto a fixed point on the part, it can make the installation process much easier than trying to match the height independently.

III. CONCEPT OF LOCATORS AND 3-2-1 PRINCIPLE OF FIXTURE DESIGN

To ensure accuracy and precision in any machining operation it is essential that the work piece is properly positioned. Jigs and fixture must be designed to use as locators. Locators ensure work pieces are precisely positioned and rigidly supported. Locators must be selected to ensure that the work piece can be easily loaded and unloaded. A tool designer must consider the following when designing jigs and fixture:

1. Positioning and locating
2. Part tolerance
3. Fool proofing
4. Duplicate location
5. Locators must always contact a workpiece on machined surface.
6. Locators should be positioned as far apart as possible. This will ensure the use of fewer locators and permits complete contact over the locating surface.

In jig and fixture design it is vital that part movement is eliminated or restricted.

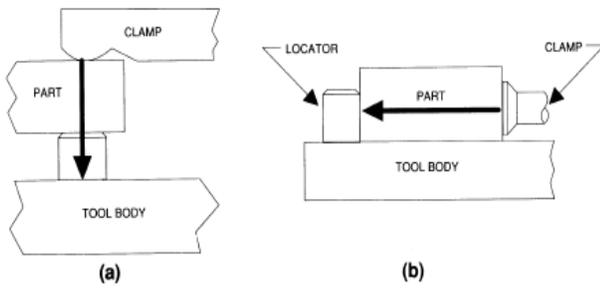


Figure 1. Locators[5].

Jigs and fixtures are used extensively for mass production. This concept will explain what the 3-2-1 principle is and how it is important for jig and fixture design. One method of reducing manufacturing cost per component is to reduce machining cycle time. The manufacturing cycle time can be reduced by reducing nonproductive time like loading, unloading, and the placing of work piece onto the machine. Here jig and fixture design has important role to play. Productive time for a machine is the time required for metal cutting operation by the machine. In short, the fixture is a tool that ensures correct and quick clamping (or loading) of the work piece with respect to the machine tool. For example, you have a drill machine and want to make a 10mm diameter hole at the point of intersection of the two diagonals of a square plate. The hole should be inclined at 45 degree angle with the surface. Now you have two choices, either you clamp the work piece with the vice or use a arrangement like below.

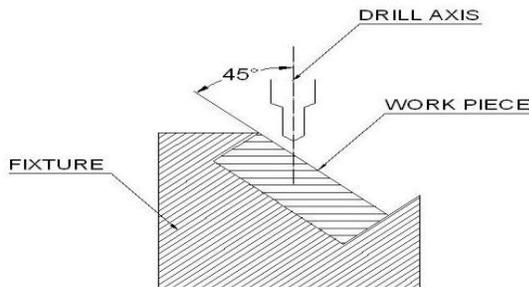


Figure 2. Work piece with the vice[5].

For a fixture designer, the major portion of design time is spent deciding how to locate the work piece in the fixture. You know that any free body has a total of twelve degrees of freedom as below:

6 translational degrees of freedom: **+X, -X, +Y, -Y, +Z, -Z**
and 6 rotational degrees of freedom:

- Clockwise around X axis (**CROT-X**)
- Anticlockwise around X axis (**ACROT-X**)
- Clockwise around Y axis (**CROT-Y**)
- Anticlockwise around Y axis (**ACROT-Y**)

- Clockwise around Z axis (**CROT-Z**)
- Anticlockwise around Z axis (**ACROT-Z**)

You must fix all the 12 degrees of freedom except the three translational degrees of freedom (-X, -Y and -Z) in order to locate the work piece in the fixture. So, 9 degrees of freedom of the work piece need to be fixed. But, how? By using the **3-2-1 method** as shown below. Rest the work piece on **three** non-collinear points of the bottom surface (XY), and you will be able to fix the **+Z, CROT-X, ACROT-X, CROT-Y** and **ACROT-Y** degrees of freedom. Now, rest the work piece at **two** points of side surface (XZ), and you will be able to fix the **+Y** and **ACROT-Z** degrees of freedom. Now, rest the work piece at **one** point of the adjacent surface (YZ), and you will be able to fix the **+X** and **CROT-Z** degrees of freedom. So, you can successfully fixate **9** required degrees of freedom by using the 3-2-1 principle of fixture design[5].

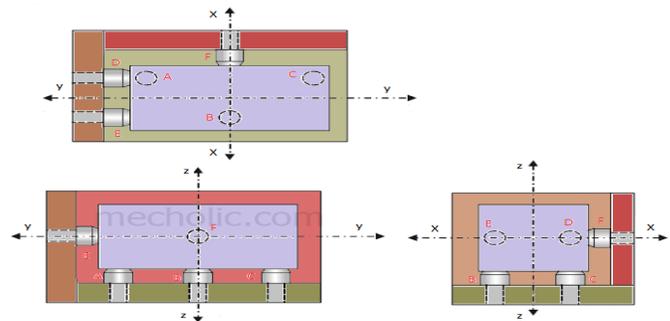


Figure 3. 3-2-1 Location principle[5].

IV. DESIGN OF ACTUAL FIXTURE

All required design principles are taken into consideration for the design of fixtures and at the same time actual component was also studied for deciding the proper positioning it at various locations for restricting any movement during actual machining. Actual drafting of fixture is done in **AutoCad2010** software. For deciding the dimensions for the part of the fixture we referred other fixtures of the similar types of jobs. Based on which optimum dimensions are selected. Materials for the same are selected from the referred fixtures. Figure shows actual two dimension and three dimension sketches of the fixture.

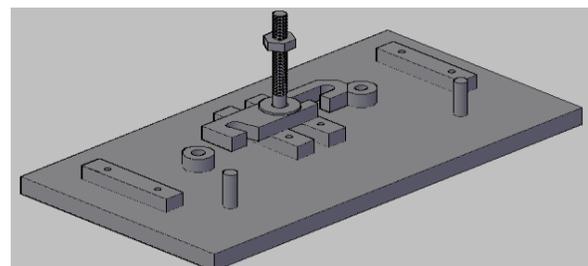


Figure 4. 3D Drawing of fixture.

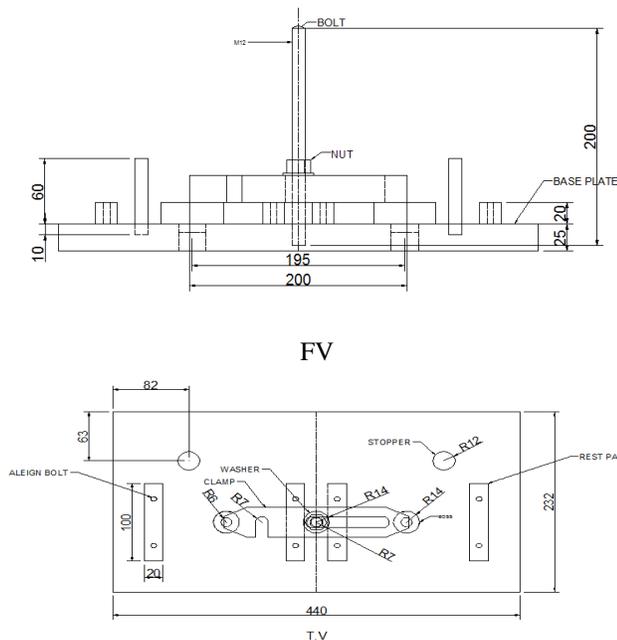


Figure 5. 2D Drawing of fixture.

V. SELECTION OF MATERIALS FOR THE FIXTURE

For selection of the material for the fixture parts similar fixtures are observed based on which selection of material is done, which shown in the following table.

Table 1. Selection of materials and their dimensions.

Sr. No.	Name of Part	Dimensions in mm	Material	Quantity
1	Base Plate	440*232*25	Mild steel	1
2	Rest Pad	100*20*20	Steel	4
3	Stopper	M12*80	Mild steel	2
4	Clamp	200*38*20	Mild steel	1
5	Clamping Stud	M12*20	Mild steel	1
6	Boss	M28.6*28.8	Steel	2
7	Washer	M14 *M7	Steel	1
8	Align Bolt	M12*180	Carbon steel	8
9	Nuts	M19*11	Steel	1
10	Paint	-----	-----	200 ml

VI. DISCUSSION

In this paper simple steps are taken for designing a such types of fixture. Though more things are considered for the same. This design of fixture is finally discussed with the sponsored company and after studying and observing all parameters by them we got final approval and further work is proceeded.

VII. CONCLUSION

After carrying out this particular type of work, we exactly understood the following things,

1. How to carry out any design activity i.e- Selection of material, drafting or designing of any part and necessary calculations.
2. Required important considerations for the design work.
3. The 3-2-1 method is the fundamental principle for all types of fixture design.
4. After designing this fixture we exactly understood the work culture of the industry.

VIII. ACKNOWLEDGMENT

We would like to express our gratitude to **Mr. Sudhir Pulsule**, Managing director, Leena Engineering, Solapur, for his consistent guidance and inspiration throughout the project work, which we are sure, will go a long way in our life. We express our sincere thanks to our principal **Dr. M. A. Chougule** and vice principal **Prof. J. M. Jaketia**. We express sincere thanks towards **Mr. S. K. Mohite**, our Head of Mechanical Engineering department, as all the success is the result of his affectionate encouragement. We express our sincere thanks to all our staffs and colleagues who have helped us directly or indirectly in completing this project. Finally, we are grateful for the many useful comments and suggestions provided by reviewers, which have resulted significant improvements.

REFERENCES

- [1] Donaldson, Lecain, Goold, "Tool design", page 573, TATA McGraw-Hill, 2001.
- [2] http://www.coe.ou.edu/manufacturing/Fixture%20Design/tutor_files/manual/typesof%20fixtures.htm.
- [3] https://www.google.co.in/Introduction+of+fixture&oq=Introduction+of+fixture&gs_l.
- [4] Dr. P. C. Sharma, "Production Engineering", page 1, S Chand publication, 2008.
- [5] <https://www.brightengineering.com/machine-design/47195-the-3-2-1-principle-of-jig-fixture-design>.