

ANFIS-Based Control of a Grid Connected Renewable Energy System using MPPT Algorithm

Prof. Neelam Labhade¹, Pravin Shelar², Prasad Kamble³, Swapnil Shinde⁴

^{1, 2, 3, 4} Department of E&TC

^{1, 2, 3, 4} Imperial College of Engineering and Research, Wagholi, Pune

Abstract- In this paper we are implementing boost converter for control of PV power by using Maximum Power Point Tracking (MPPT) mechanism. Ist the PV module is analyzed with the help of SIMULINK software. The main aim of the project is to use the boost converter along with a Maximum Power Point Tracking Technique. The MPPT is responsible for generating the maximum possible power from the PV and feed it to the load via the boost converter which steps up the voltage at required value. The main aim of project is to track the maximum power point of the PV module so that the maximum possible power can be generated from the PV. The algorithms used for MPPT is generalized algorithm and are easy to design or to generate a code. The algorithms are generated using MPLAB and its simulation. Adaptive Neuron-Fuzzy Inference system (ANFIS) is a fuzzy logic which is introduced to work for approximate range of values. It integrates neural networks and fuzzy logic principles. ANFIS is more efficient and optimal way, one can use the best parameters obtained by genetic algorithm.

Keywords- ANFIS, MPPT, Scheduling-algorithm

I. INTRODUCTION

The One of the major concerns in the power sector is the day-to-day increasing power demand but the unavailability of enough resources to meet the power demand using the conventional energy sources. Demand has increased for renewable sources of energy to be utilized along with conventional systems to meet the energy demand. Renewable sources like wind energy and solar energy are the prime energy sources which are being utilized in this regard. The continuous use of fossil fuels has caused the fossil fuel deposit to be reduced and has drastically affected the environment depleting the biosphere and cumulatively adding to global warming. Solar energy is abundantly available that has made it possible to harvest it and utilize it properly. Solar energy can be a standalone generating unit or can be a grid connected generating unit depending on the availability of a grid nearby. Thus it can be used to power rural areas where the availability of grids is very low. Another advantage of using solar energy is the portable operation whenever wherever necessary. In order to tackle the present energy crisis one has to develop an efficient manner in which power has to be extracted from the

incoming solar radiation. The power conversion mechanisms have been greatly reduced in size in the past few years. The development in power electronics and material science has helped engineers to come up very small but powerful systems to withstand the high power demand. But the disadvantage of these systems is the increased power density. Trend has set in for the use of multi-input converter units that can effectively handle the voltage fluctuations. But due to high production cost and the low efficiency of these systems they can hardly compete in the competitive markets as a prime power generation source. The constant increase in the development of the solar cells manufacturing technology would definitely make the use of these technologies possible on a wider basis than what the scenario is presently. The use of the newest power control mechanisms called the Maximum Power Point Tracking (MPPT) algorithms has led to the increase in the efficiency of operation of the solar modules and thus is effective in the field of utilization of renewable sources of energy.

II. LITERATURE REVIEW

The topic of solar energy utilization has been looked upon by many researchers all around the globe. It has been known that solar cell operates at very low efficiency and thus a better control mechanism is required to increase the efficiency of the solar cell. In this field researchers have developed what are now called the Maximum Power Point Tracking (MPPT) algorithms.

In the paper [1], Pablo García et.al said and describes and evaluates an adaptive neuro-fuzzy inference system (ANFIS)-based energy management system (EMS) of a grid-connected hybrid system. It presents a wind turbine (WT) and photovoltaic (PV) solar panels as primary energy sources, and an energy storage system (ESS) based on hydrogen (fuel cell-FC-,hydrogen tank and electrolyzer) and battery. All of the energy sources use dc/dc power converters in order to connect them to a central DC bus. An ANFIS-based supervisory control system determines the power that must be generated by/stored in the hydrogen and battery, taking into account the power demanded by the grid, the available power, the hydrogen tank level and the state-of-charge (SOC) of the

battery. Furthermore, an ANFIS-based control is applied to the three-phase inverter, which connects the hybrid to grid. Otherwise, this new EMS is compared with a classical EMS composed of state-based supervisory control system based on states and inverter control system based on PI controllers. Dynamic simulations demonstrate the right performance of the ANFIS-based EMS for the hybrid system under study and the better performance with respect to the classical EMS.

In the paper [2], Mummadi Veerachary et.al said on the use of a SEPIC converter in the field of photovoltaic power control. In his report he utilized a two-input converter for accomplishing the maximum power extraction from the solar cell.

In the paper [3], P. S. Revankar et.al said and even included the variation of sun's inclination to track down the maximum possible power from the incoming solar radiations. The control mechanism alters the position of the panel such that the incoming solar radiations are always perpendicular to the panels.

In the paper [4], M. Berrera et.al said compared seven different algorithms for maximum power point tracking using two different solar irradiation functions to depict the variation of the output power in both cases using the MPPT algorithms and optimized MPPT algorithms.

All current models use Flash memory for program storage, and newer models allow the PIC to reprogram itself. Program memory and data memory are separated. Data memory is 8-bit, 16-bit and in latest models, 32-bit wide. Program instructions vary in bit-count by family of PIC, and may be 12, 14, 16, or 24 bits long. The instruction set also varies by model, with more powerful chips adding instructions for digital signal processing functions.

III. BLOCK DIAGRAM AND DESCRIPTION

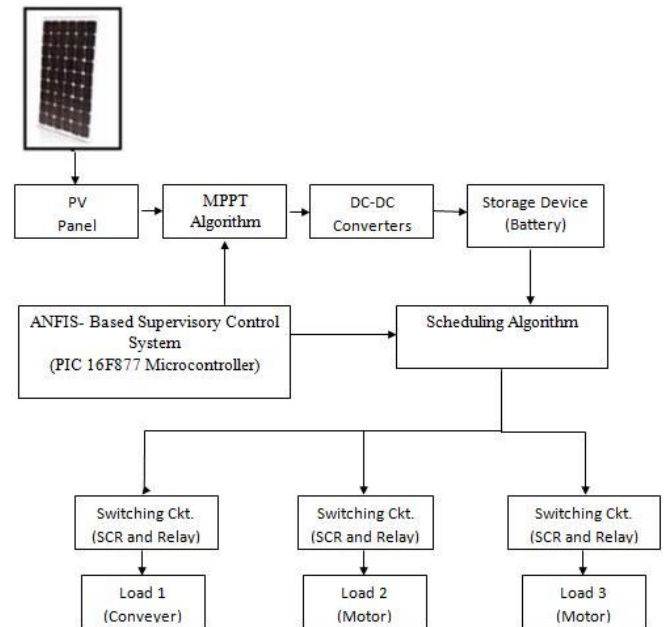


Fig.1 Block Diagram

MPPT Algorithm:

The efficiency of a solar cell is very low. In order to increase the efficiency, methods are to be undertaken to match the source and load properly. One such method is the Maximum Power Point Tracking (MPPT). This is a technique used to obtain the maximum possible power from a varying source. In photovoltaic systems the I-V curve is non-linear, thereby making it difficult to be used to power a certain load. This is done by utilizing a boost converter whose duty cycle is varied by using a mppt algorithm. Few of the many algorithms are listed below and A boost converter is used on the load side and a solar panel is used to power this converter.

DC-DC Converter:

Boost converter steps up the input voltage magnitude to a required output voltage magnitude without the use of a transformer. The main components of a boost converter are an inductor, a diode and a high frequency switch. These in a co-ordinated manner supply power to the load at a voltage greater than the input voltage magnitude. The control strategy lies in the manipulation of the duty cycle of the switch which causes the voltage change.

PIC Microcontroller:

PIC is a family of modified Harvard architecture microcontrollers made by Microchip Technology, derived

from the PIC1650 originally developed by General Instrument's Microelectronics Division. The name PIC initially referred to Peripheral Interface Controller. The first parts of the family were available in 1976; by 2013 the company had shipped more than twelve billion individual parts, used in a wide variety of embedded systems.

IV. SOFTWARE DEVELOPMENT


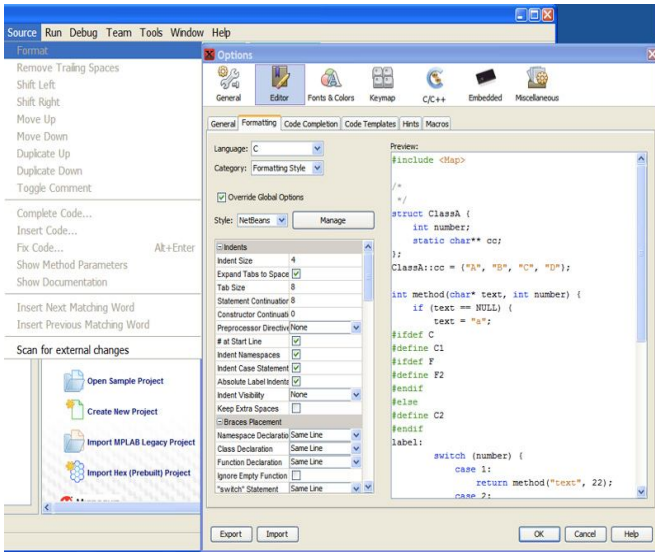


Fig.2 MPLAB Software

MPLAB X is the latest edition of MPLAB, and is developed on the Net Beans platform. MPLAB and MPLAB X support project management, code editing, debugging and programming of Microchip 8-bit, 16-bit and 32-bit PIC microcontrollers. MPLAB is designed to work with MPLAB-certified devices such as the MPLAB ICD 3 and MPLAB REAL ICE, for programming and debugging PIC microcontrollers using a personal computer. PIC Kit programmers are also supported by MPLAB.


V. RESULTS

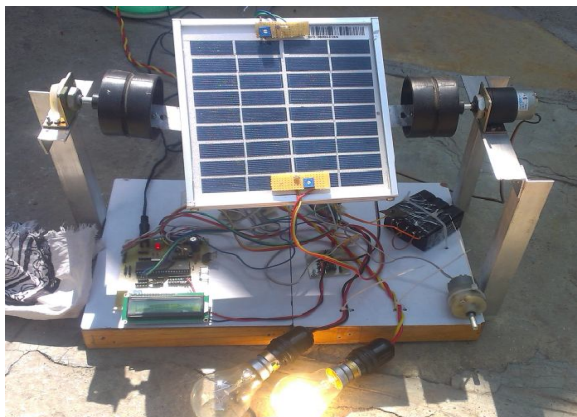

a) Above Img. show the initial stage of solar cell tracking.



b) Above Img. shows when solar voltage is greater than 8.14V

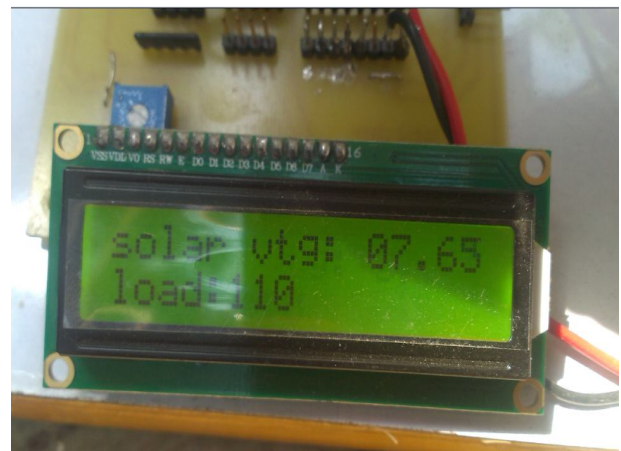

c) Above Img. shows when solar voltage is in between 6.12V and 8.14V



d) Above Img. shows when solar voltage is less than 6.12V

VII. APPLICATION AND ADVANTAGES

Applications:

1. Industrial Power Management for various loads like Motors, Conveyers etc.

2. Can be Used Smart Grid Energy Networks.
3. Can used to schedule load of home Appliances.

Advantages:

1. Because of Maximum power transfer to storage there is improvement in device charging time.
2. Increases backup capacity with the use of scheduling algorithms.
3. By using solar energy it does not required fuel, non-polluting & quick responding
4. Easy maintenance & Efficient

VIII. ACKNOWLEDGEMENT

It gives us a great pleasure to submit our project report of research work. We are extremely grateful to our guide Prof. Neelam Labhade of electronics and telecommunication engineering, pune for his constant source of inspiration and continuous guidance and encouragement during this work.

We express our deep sense of gratitude towards Prof. Dr. S.V. Admane, Principal, JSPM'S Imperial college of engineering and research wagholi, pune for encouragement to complete the work.

We are very grateful to Prof. P.R Badadapure Head of department of ICOER, Wagholi, pune for making available all the facilities required for the successful completion of the project.

Lastly, we are thankful to those directly and indirectly helped us and supported us to complete this work.

IX. CONCLUSION

In this report the sun tracking system was implemented which is based on PIC Microcontroller. After examining the information obtained in the data analysis section it can be said that proposed sun tracking solar array system is feasible method of maximizing the energy received from solar radiation.

When MPPT is used there is no need to input the duty cycle, the algorithm iterates and decides the duty cycle by itself. But if MPPT had not been used, then the user would have had to input the duty cycle to the system. When there is change in the solar irradiation the maximum power point changes and thus the required duty cycle for the operation of the model also changes.

But if constant duty cycle is used then maximum power point cannot be tracked and thus the system is less efficient. The various waveforms were obtained by using the plot mechanism in MATLAB. There is a small loss of power from the solar panel side to the boost converter output side. This can attributed to the switching losses and the losses in the inductor and capacitor of the boost converter. This can be seen from the plots of the respective power curves.

REFERENCES

- [1] Pablo García, Carlos Andrés García, Luis M. Fernández, Member, IEEE, Francisco Llorens and Francisco Jurado, Senior Member, IEEE “ANFIS-Based Control of a Grid-Connected Hybrid System Integrating Renewable Energies, Hydrogen and batteries”, IEEE Transaction on Industrial Informatics, Vol.2, No.2, May 2014.
- [2] Mummadi veerachary, Tomonobu Senjyu, Katsumi Uezato, “ Feed forward maximum Power Point Tracking of PV systems using fuzzy controller”, Transaction on Industrial Informatics, Vol. 38, No.3, July 2002.
- [3] P. S. Revankar, W. Z. Gandhare, and A. G. Thosar, “Maximum power point tracking and efficiency enhancements for PV systems”, International Journal of Computer Applications, Vol. 1, No. 27, 2010
- [4] M. Barrera, A. Dollar, R. Faranda, and S. Leva, “Experimental test of seven widely-adopted MPPT algorithms”, in Proc. IEEE Bucharest PowerTech Conf., Vol. 8, pp.1–8, 2009.
- [5] M. G. Villalva, J. R. Gazoli, E. Ruppert F , “Comprehensive approach to modeling and simulation of photovoltaic arrays”, IEEE Transactions on Power Electronics, Vol. 25, No. 5, pp. 1198--1208, ISSN 0885-8993, 2009.
- [6] Ramos Hernanz JA, Campayo Matrin JJ, Zamora Belver I, Larranaga Lesaka J, Zulueta Guerrero E and Puelles Perez E, “Modelling of Photovoltaic Module”, International Conference on Renewable Energies and Power Quality (ICREPQ' 10) Granada (Spain) , 2010.
- [7] Huan-Liang Tsai, Ci-Siang Tu, and Yi-Jie Su, “Development of Generalized Photovoltaic Model Using MATLAB/SIMULINK”, Proceedings of the World Congress on Engineering and Computer Science 2008 WCECS 2008, San Francisco, USA, October 22 - 24, 2008.