

Emission Analysis of Diesel Engine using Waste Plastic Pyrolysis oil and Diesel blends

N. Vasukumar¹, Dr. D. Subramanyam²

^{1,2}Department of Mechanical Engineering

^{1,2}Siddarth Institute of Engineering Technology, Puttur, A.P, India

Abstract- *The Emissions from an Automobile brings severe problems to mankind and living environment. Modern world uses many components with plastic as a primary source due to its light weight, easy carrying, low cost. Consumption of plastics increasing drastically year by year there is a problem with plastics .Dumping of waste plastics into the land fields, municipal waste produces pollution problems. Waste to energy is the recent concept to convert waste into quality fuel. This present paper presents the use of waste plastic pyrolysis oil as alternative fuel in testing the single cylinder four stroke kirloskar (5HP) diesel engine. Emission Analysis of waste plastic pyrolysis oil with diesel blends with, different blending ratios like WPO15, WPO20, WPO30, WPO40, and WPO50, used in single cylinder diesel engine at constant speed 1500 rpm with no load to full load conditions at rated brake power. Results shows that give WPO20 gave good results when compared to pure diesel. The Engine Exhaust Emissions were Carbon monoxide(CO),Carbon dioxide (CO₂),Unburned hydro carbon (UBHC),and Oxides of Nitrogen (NO_x) measured by Indus five gas analyzer model PEA 205.*

Keywords- alternative fuel, Diesel engine, waste plastic oil, pyrolysis process, Emission parameters

I. INTRODUCTION

Plastic consumption is increasing day to day life Due to its less weight, easy carrying low manufacturing cost. The increase in the rate of plastic consumption throughout the world has led to the creation of more and more amounts of waste, and this in turn poses greater difficulties for disposal. Plastic utilization is expanding drastically consistently because of the relative ease of generation in contrast with different materials and accommodation being used and application. In 2015, plastic creation achieved the 322 million tones worldwide and the 59 million tons in the European Union. Plastic is major commodity used in recent years, significant growth in the consumption of plastic globally has been due to the introduction of plastics into newer application areas such as in automotive field, rail, transport, aerospace, medical and healthcare, electrical and electronics, telecommunication, building and infrastructure, and furniture. Waste to energy is the new concept in recent years all over the world researchers

are looking for alternative fuel to reduce depend on fossile fuels(2,3,4). Ashish Y. Pund et al (1) studied on Experimental Investigation of Performance Characteristics for CI Engine using Waste Plastic Oil and Ethanol blends as substitute fuel for diesel engine results shows that D-90 WPO 10,D-90 E-10 blends are better than pure diesel. Rajesh Guntur et al (2) reported on Experimental Investigations on the Performance and Emission Characteristics of a Diesel Engine Fuelled with Plastic Pyrolysis Oil Diesel Blends The present investigation was to study the performance and emission characteristics of a single cylinder, four-stroke, air-cooled diesel engine run with waste plastic pyrolysis oil-diesel blends. At full load Brake thermal efficiency of the engine is less than the diesel fuel operation and higher at part loads. Unburned hydrocarbon and Carbon dioxides were marginally higher than that of the diesel baseline. The toxic gas carbon monoxide emission of waste plastic pyrolysis oil was higher than diesel. Kintesh D Patel et al (3) studied on Performance and Emission Analysis of Diesel Engine using Waste Plastic Pyrolysis Oil and Diesel Blend: A Review Change of waste to energy is one of the recent trends in minimizing the waste transfer as well as could be utilized as a substitute fuel for internal combustion engines As an option, non-biodegradable, and renewable fuel, waste plastic oil is accepting expanding consideration. Ioannis Kalargaris et al (4) experimented on The utilization of oils produced from plastic waste at different pyrolysis temperatures in a DI diesel engine. Pyrolysis is a chemical recycling process that can convert plastics into high quality oil, which can then be utilized in internal combustion engines for power and heat generation. The aim of this work is to evaluate the potential of using oils that have been derived from the pyrolysis of plastics at different temperatures in diesel engines. The plastic pyrolysis oils were then tested in a four-cylinder direct injection diesel engine, and their combustion, performance and emission characteristics analyzed and compared to mineral diesel. The engine was found to perform better on the pyrolysis oils at higher loads. The pyrolysis temperature had a significant effect, as the oil produced at a lower temperature presented higher brake thermal efficiency and shorter ignition delay period at all loads. Ioannis Kalargaris (5) et al studied on Combustion, performance and emission analysis of a DI diesel engine using plastic pyrolysis oil. The plastic pyrolysis oil was tested on a four-cylinder direct injection diesel engine running

at various blends of plastic pyrolysis oil and diesel fuel from 0% to 100% at different engine loads from 25% to 100%. The engine combustion characteristics, performance and exhaust emissions were analyzed and compared with diesel fuel operation. The results showed that the engine is able to run on plastic pyrolysis oil at high loads presenting similar performance to diesel while at lower loads the longer ignition delay period causes stability issues. D. K. Ramesha et al (6) Experimental Investigation on Combustion, Performance and Emission characteristics of blends of Plastic oil and Biodiesel as a substitute fuels in Diesel Engine. Waste plastic oil is suitable for compression ignition engines and more attention is focused in India because of its potential to generate large-scale employment and relatively lower scale degradation. The present investigation was to study the effect of plastic oil blend with B20 rubber biodiesel and B20 honge biodiesel on four strokes, single cylinder direct Injection diesel engine. Results show that performance characteristics were found to be comparable with diesel. The emission characteristics shows that NOx emission levels are slightly higher and other emissions like CO, HC are compatible with diesel modes of operation. Hence plastic oil can be used as substitute fuel in place of conventional diesel fuel.


Sanjeev et al (8) Experimental Investigation on Performance of Direct Injection Diesel Engine Fuelled with Jatropa Methyl Ester, Waste Plastic Oil and Diesel Oil. For this experiment we used four stroke, single cylinder, water cooled, direct injection (DI) diesel engine. Four different blends of varying WPO, JME and diesel from 10% to 50% at steps of 10% on a volume basis, were considered for the investigation. Performance parameters are evaluated at different blend ratios and are compared with those of diesel. 20% blend with equal ratio of WPO and JME in diesel shows nearly same results as compared to diesel.

From the Literature survey the present investigation was on single cylinder Four stroke Diesel engine with waste plastic pyrolysis oil and diesel blends with different mixing ratios likewise WPPO15, WPPO20, WPPO30, WPPO40 and WPPO50 at constant speed and different load conditions.

II. PRODUCTION OF WASTE PLASTIC PYROLYSIS OIL

Waste plastic oil is prepared by the pyrolysis process. Pyrolysis technology is thermal degradation process in the absence of oxygen. Plastic waste is treated in a cylindrical reactor at temperature of 300°C – 350°C. The plastic waste is gently cracked by adding catalyst and the gases are condensed in a series of condensers to give a low sulphur content

distillate. All this happens continuously to convert the waste plastics into fuel that can be used for generators.

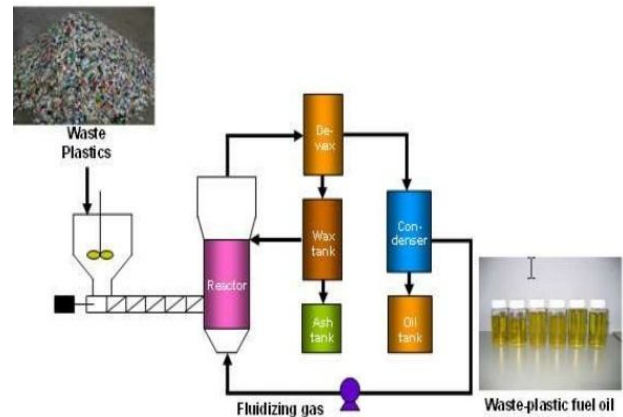

Process of Pyrolysis of Waste Plastics Technology

Figure 1. Plastic pyrolysis process

III. FRACTIONAL DISTILLATION OF WASTE PLASTIC PYROLYSIS OIL

Produced plastic oil was heated on electric heater above 100 o c to remove dust particles and impurities present in the oil .Heated oil vapour was collected and cooled by water to produce distilled plastic oil. This distilled oil was used in single cylinder 4-stroke Kirloskar Diesel engine (HMTO4) to find out performance emission parameters. Waste plastic pyrolysis oil collected from the plant. Collected WPPO Heated above 100 0 c and then cooled by fresh water to produce distilled plastic oil.



Figure 2. Schematic layout of Fractional Distillation Setup

IV. BLENDING OF DIESEL WITH PLASTIC OIL

Plastic oil from the plant was collected. Distillation process was used to convert dust into pure plastic oil blend

the diesel with plastic oil. Different blends was prepared with diesel like wise WPPO15, WPPO20, WPPO30,WPPO40,WPPO50,WPPO100 used in single cylinder 4-stroke Diesel Engine kirloskar 5HP to test engine with constant speed with varying load condition



Figure 3. Tested samples of plastic oil with Diesel blends

V. PROPERTIES OF DIESEL WASTE PLASTIC OIL AND DIESEL

Table 1.

Fuel	Kinematic Viscosity at 40°C (cst)	Density (kg/m ³)	Calorific value (kJ/g)	Cetane number	Flash Point (°C)	Fire Point (°C)
Diesel	3.5	850	42000	55	45	46
Waste plastic pyrolysis oil	2.78	793	41858	51	36	39

VI. EXPERIMENTAL SETUP

The Engine chosen to carry out experimentation on a single cylinder, four stroke, vertical, water cooled, Kirloskar make CI Engine. This engine can withstand higher pressures encountered and also is used extensively in agriculture and industrial sectors. Therefore this engine is selected for carrying experiments. The specifications of the engine given Table 4.1. Fig. 4.1 shows the actual photos of the C.I. Engine and its attachments.



Figure 4. Experimental set up of C.I. Engine

VII. ENGINE SPECIFICATIONS

Table 2. Engine Specifications.

Engine	Four stroke, single cylinder, water cooled, diesel engine, Kirloskar engine (HMT04)Ltd
Ignition System	Compression Ignition
Bore	0.0875m
Stroke	0.11m
Compression ratio	17.5:1
Speed	1500 rpm

The performance investigation of diesel blends with plastic oil (WPPO15, WPPO 20, WPPO 30, WPPO 40, and WPPO50) with Waste plastic oil have been studied and compared with diesel fuel at constant speed for different loads. The experiments were conducted at no load to full load condition. Emission Parameters, including Carbon monoxide (CO),Carbon dioxide (CO₂),Unburned hydro carbon (UBHC),and Oxides of Nitrogen (NO_x) were computed with waste plastic oil as alternative fuel.

VIII. RESULTS AND DISCUSSION

Engine Exhaust Emissions

Carbon Monoxide (CO%).

Figure 4.4.1 compares the carbon monoxide (CO) emissions, with respect to brake power. CO emissions of all the fuels had a tendency to increase with load. CO emissions were slightly increases with increasing plastic oil content. The CO emissions of all blends were more than that of Diesel for all loads. The percentage of CO emissions of Diesel, WPO15, WPO20, WPO30, WPO40 and WPO50 blends were 3.69, 3.72, 3.86, 3.96, 4.38 and 4.48 respectively. High CO emission from the diesel engine is sign of in complete combustion; Diesel produces the lowest CO emission.

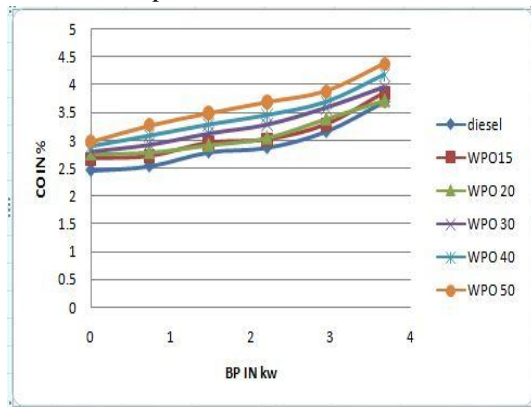


Figure 5. BP Vs CO in %

Carbon Dioxide (CO2)

The Variation of carbon dioxide with plastic oil blends with different brake power is graphically represented in Fig 4.4.2. It was observed that the percentage of carbon dioxide in all the blends was found to be low at all loads as compare to Diesel. At the brake power of 3.73kW, the percentage Carbon dioxide of Diesel, WPO15, WPO20, WPO30 for were 7.1, 7.45, 7.53, and 7.64, respectively. For WPO15 and WPO20 the percentage of carbon dioxide is increased compared to 100% diesel were 0.35 and 0.43 respectively. Co2 formed by the complete oxidation of carbon atoms contained in the fuel.

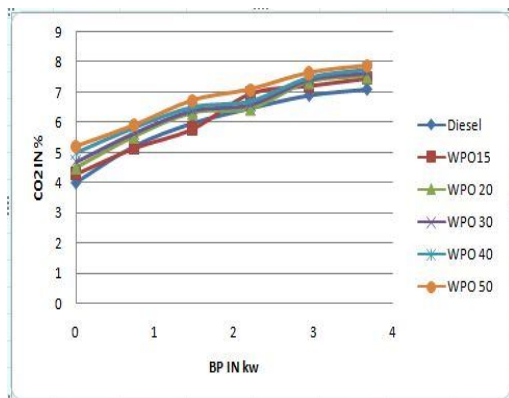


Figure 6. BP Vs CO2 in %

HC Emission

The Variation of unburned hydrocarbon with Biodiesel blends with different brake power is graphically represented in Fig.4.4.3 It was observed that the percentage of hydrocarbon in all the blends as compared to diesel was found to be high at all loads. At the brake power of 3.67kW, the hydrocarbon of about 1606 ppm for 100% diesel and 1610 ppm for WPO15. The 04 ppm of hydrocarbon is increased compared to 100% diesel and also it was observed that the proportion of plastic oil aromatic content increases the percentage of unburned hydrocarbon

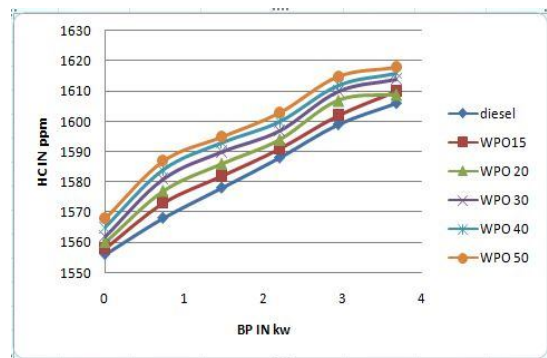


Figure 7. BP Vs HC in ppm

NOx Emission

The Variation of NOx with plastic oil with diesel blends with different brake power is graphically represented in Fig 4.4.4 It was observed that the percentage of NOx in all the blends was found to be low at all load as compared to diesel. At the load 5 kg, the NOx reaches its maximum of 855 ppm for 100% Diesel and 869 ppm for WPO15. The 14 ppm of NOx increased compared to 100% diesel and also it was observed that the proportion of plastic oil blends increases the 14 ppm of NOx increases.

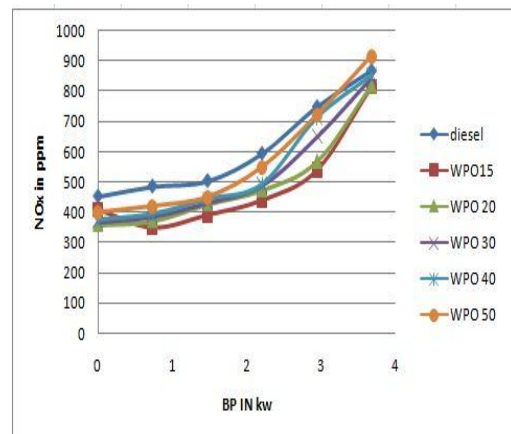


Figure 8. BP Vs NOx in ppm

IX. CONCLUSIONS

Emission investigation of single cylinder four stroke diesel engine was run with waste plastic oil and diesel blends as alternative fuel.

Waste to energy is the recent concept which will focus new interest on research.

Carbon monoxide emission increases with increasing brake power at load conditions at 3.67 kw the co emission for plastic oil blends WPO15,WPO20,WPO30,WPO40 and WPO50 3.69 ,3.63 ,3.72,3.96,4.18 and 4.18%.

Carbon dioxide emission of plastic oil blends with diesel increases slightly at WPO20 brake power decreases less than that of diesel due to complete combustion of fuel.

Hydro carbon emission plastic oil blends more than that of diesel at all brake powers.at 3.67 kw bp hc emission for diesel , WPO15,WPO20,WPO30,WPO40,and WPO50 were1606, 1610, 1609, 1614, 1616 and 1618 ppm.

Nitrogen oxide emissions of all tested plastic oil blends were low at part loads and high at maximum load conditions. WPO15, WPO20, WPO30, WPO40, and WPO50 870, 815, 820, 845, 852 and 915 ppm.

X. ACKNOWLEDGEMENT

Special Thanks to Dr.S.SUNILKUMAR REDDY Head of The Department SIETK Puttur & SV University Mechanical Department Technical staff For their cooperation.

REFERENCES

- [1] Pawar H.R. and Lawankar S.M. Experimental Investigation on Compression Ignition Engine with Waste Plastic Oil and its blends with Ethanol Research Journal of Engineering Sciences ISSN 2278 – 9472 Vol. 2(5), 1-5, May (2013) Res. J. Engineering
- [2] Sanjeev1, Dr. Sudhir Kumar21NIT, Kurukshetra “Experimental Investigation on Performance of Direct Injection Diesel Engine Fuelled with Jatropa Methyl Ester, Waste Plastic Oil and Diesel Oil” Journal of Material Science and Mechanical Engineering (JMSME) Print ISSN : 2339-9095; Online ISSN : 2393-9109; Volume 2, Number 6; April – June, 2015 pp 72 – 75 Krishi Sanskriti Publications [http://www.krishisanskriti.org/jmsme.html]
- [3] Senthilkumar Tamilkolundu1. Chandrasekar Murugesan et al “The Evaluation of blend of Waste Plastic Oil-Diesel fuel for use as alternate fuel for transportation” 2nd International Conference on Chemical, Ecology and Environmental Sciences (ICCEES'2012) Singapore April 28-29, 2012
- [4] Kintesh D Patel1 Dr. Tushar M Patel2 “ Performance and Emission Analysis of Diesel Engine using Waste Plastic Pyrolysis Oil and Diesel Blend: A Review” IJSRD - International Journal for Scientific Research & Development| Vol. 4, Issue 12, 2017 | ISSN (online): 2321-0613
- [5] Ioannis Kalargaris, Guohong Tian, Sai Gu “The utilisation of oils produced from plastic waste at different pyrolysis temperatures in a DI diesel engine”© 2017 The Author(s). Published by Elsevier Ltd. This is an open access article under the CC BY license(<http://creativecommons.org/licenses/by/4.0/>)
- [6] Ioannis Kalargaris, Guohong Tian, Sai Gu* “Combustion, performance and emission analysis of a DI diesel engine using plastic pyrolysis oil” © 2016 The Authors. Published by Elsevier B.V. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).
- [7] Ioannis Kalargaris, Guohong Tian, Sai Gu “Experimental evaluation of a diesel engine fuelled by pyrolysis oils produced from low-density polyethylene and ethylene–vinyl acetate plastics” © 2017 The Authors. Published by Elsevier B.V. This is an open access article under the CC BY licens (<http://creativecommons.org/licenses/by/4.0/>).
- [8] Vijaya Kumar Kareddula *, Ravi Kumar Puli “Influence of plastic oil with ethanol gasoline blending on multi cylinder spark ignition engine” 2017 Faculty of Engineering, Alexandria University. Production and hosting by Elsevier B.V. This is an open access article under the CC BY-NC-ND license
- [9] Tarun B Patel , Prof K D Panchal, Dr A S Shah “An Experimental Investigation on the Performance Parameters using WTO-Diesel blends with Additives in a Diesel Engine” Vol-2 Issue-3 2016 IJARIE-ISSN (O)-2395-4396 2385
- [10] Rajesh Guntur1 and P. Ravi Kumar2 “Experimental Investigations on the Performance and Emission Characteristics of a Diesel Engine Fuelled with Plastic Pyrolysis Oil – Diesel Blends” nInternational Journal of Manufacturing Science and Engineering International

Science press Volume 2 No 1 January-june 2011

- [11] Sudhir Kumar.J a , Ravi.K b, Satyanarayana.Dc, Venkata Subbaiah.Kd , V.V.Prasada Rao.Pe “Experimental studies on a SI engine using Plastic Petrol derived from Waste Plastic” International Journal of Thermal Technologies, Vol.2, No.2 (June 2012) ISSN 2277 – 4114153
- [12] S Madiwale¹, A Karthikeyan² and V Bhojwani³ “A Comprehensive Review of Effect of Biodiesel Additives on Properties, Performance, and Emission” IOP Conf. Series: Materials Science and Engineering 197 (2017) 012015 doi:10.1088/1757-899X/197/1/012015
- [13] Ashish Y. Pund¹ B. N. Kale² Rahul D. Gorle³ G.D.Gosavi⁴ “Experimental Investigation of Performance Characteristics for CI Engine using Waste Plastic Oil and Ethanol” IJSRD - International Journal for Scientific Research & Development| Vol. 3, Issue 06, 2015 | ISSN (online): 2321-0613
- [14] Naveen.G, C.Thamotharan, Dr. P.Naveenchandran “Investigation of engine performance and Emissions Characteristics of twin cylinder Diesel Engine Fueled with Tyre pyrolysis oil & Diesel Blends with multifunctional diesel fuel Additive” ISSN: 2319-5967 ISO 9001:2008 Certified International Journal of Engineering Science an Innovative Technology (IJESIT) Volume 4, Issue 2, March 2015
- [15] Pragyan P. Patnaik, Shakti P. Jena, Saroj K. Acharya*, Harish C. Das “Effect of FeCl₃ and diethyl ether as additives on compression ignition engine emissions”© 2017 Chinese Institute of Environmental Engineering, Taiwan. Production and hosting by Elsevier B.V.This is an open access article under the CCBY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).