

# Study Paper on Concurrent Engineering: Important Role in Product Development Process

Mr. Vyankatesh S. Awasare<sup>1</sup>, Prof. Sourabh Borchate<sup>2</sup>

<sup>1,2</sup> Department of Mechanical Engineering

<sup>1,2</sup> Dr. D. Y. Patil Institute of Engineering, Management and Research, Akurdi, Pune

**Abstract-** Nowadays, Concurrent Engineering (CE) is becoming more important as companies compete in the worldwide market. Reduced time in product development process, higher product quality, lower cost in manufacturing process and fulfilment of customers' requirements are the key factors to determine the success of a company. To produce excellent products, the concept of Concurrent Engineering must be implemented. Concurrent Engineering is a systematic approach which can be achieved when all design activities are integrated and executed in a parallel manner. The CE approach has radically changed the method used in product development process in many companies. Thus, this paper reviews the basic principles and tools of Concurrent Engineering and discusses how to employ them. Similarly, to ensure a product development process in the CE environment to run smoothly and efficiently, some modifications of the existing product development processes are proposed; these should start from market investigation to detail design.

## I. INTRODUCTION

Concurrent Engineering (CE) is sometimes called simultaneous engineering, integrated engineering or life-cycle engineering, which is more a philosophy than a method (Tummala et al., 1997). The concept of CE was initially proposed as a means to minimize product development time (Winner et al., 1988).

Some common definitions are as follows:

“Concurrent engineering is the extent to which product and process designs are generated simultaneously in the early stages of the product development process” (Koufteros et al., 2001).

Another definition of CE was presented by Junjie et al. (2006), as:

“Concurrent engineering is an advanced manufacture technology in modern product design and development, which is a compact and concurrent systematic method of product design and its corresponding process (including manufacturing process and supporting process).”

Nowadays, CE is regarded as a key factor in determining the success of a company. CE involves overlapping various stages of developing new products to reduce delays. This reduction of delays is achieved by intensively implementing the CE principles. These CE principles have been cited as the main keys for the rapid new product development process and it was introduced by the Japanese firms (Bowonder and Miyake, 1993).

However, employing CE has not always been proven easy. As the popularity of CE grows and its applications have become more diverse, the core principles which define CE have become more and more vague. The CE approach is sometimes viewed as expensive in the short term, requiring resources and levels of commitment which may not be available.

According to Sapuan (2006), implementing the CE can reduce costs, shorten the time of product development process and improve product quality (CTQ), if all design activities are performed in a parallel manner and the decision making among different groups are integrated. However, CE does not mean a simultaneous undertaking of all activities in the product development process at the same time. The objectives of this paper were to present the findings of the research on the use of CE in the product development process, review several CE principles and tools in solving product development process problems as well as propose some modifications of the existing product development process.

Concurrent Engineering is not a quick fix for a company's problems and it's not just a way to improve Engineering performance. It's a business strategy that addresses important company resources. The major objective this business strategy aims to achieve is improved product development performance. Concurrent Engineering is a long-term strategy, and it should be considered only by organizations willing to make up front investments and then wait several years for long-term benefits. It involves major organizational and cultural change. The problems with product development performance that Concurrent Engineering aims to overcome are those of the traditional serial product development process in which people from different

departments work one after the other on successive phases of development.

## II. HISTORY OF CONCURRENT ENGINEERING

There are many alternative definitions available for concurrent engineering, but this list is quite typical. The increasing of the role of manufacturing process on the design of process of product design, the formation of cross-functional equipment to obtain the development process, a concentration in on client during the development process, and the use of the implementation time as source of competitive advantage is all the part of the definition. All the products have a necessity to incorporate the restrictions imposed by the process of manufacture in the product design. Depending on the manufacture consideration for the process, these effects can be codified in formal or computerized rules, or can be transported with individual experience and expert work. Defining these concerns in the early design in the development process creates the opportunity to reduce manufacture costs and to improve quality of the product.

The method to obtain the integration of the design with other functions is often with the use of cross-functional teams. These teams can include to people with masters in the excellent production, commercialization, finances, service or other areas, this depends on the type of product. Another important functional barrier is the separation between the engineering designer and the client. Under same philosophy to eliminate the barrier of the design-manufacture, the designer can make more responsive to desires of the client and such way create a success product more and this is known like integration of the design-commercialization. The implementation time has demonstrated to be a significant facet of the modern competition. By Diminishing the time of obtaining the product the company/signature can respond to the tendencies of the market or to the new built-in technologies quickly. Decreasing the implementation time creates an advantage of the market for those companies that can produce products quickly.

All these ideas are the fundamental of the concurrent engineering and it have been discussed in Literature during many years before the appearance of the concurrent movement of engineering. The product designs have existed for while the production in mass has existed. At the beginning, a division of work of the intellectual appeared by whom the designer was responsible to present/display the design and the manufacturer was responsible to make the product real. Due to this division there is the opportunity so that the designer of the product works in the ignorance of manufacturer' constraints. And then the designer became blamed by throwing the design over the

wall which separates design of the manufacture and this design that is thrown on the proverbial wall is generally difficult and expensive to produce, and it does not adjust necessarily to desires of the market.

More frequently repeated between these reasons they are an increasing level of competition, the role of the new process of manufacture, and the necessity to reduce implementation time of the development. All these justifications to push concurrent engineering ideas have deep historical antecedents. These justifications are discussed down.

### 1. Increased Competition

A justification given for the necessity of the increasing cooperation in the process of the product development is an increasing level of competition. There have been demands that the competition level has increased recently occasionally when we did not consider recent more.

For example, a claim is that the competition level has increased from the start of century of the nineteenth and the modern companies cannot be allowed not to pay attention to the design-manufacturing interaction. Similar, another say is that the one of high level of the competition in 1950's required that the personal of the design and the manufacture cooperate in the new product development. The economic competition is and has been always fierce now and this effect is not new.

### 2. New Production Methods

Whereas the new methods of production enter in good condition gets to be important to get the knowledge on the new processes of production and its effects on the resulting product design to take advantage, and responds to the limitations of the new processes. The knowledge on these processes should be available for the designer of the product. This knowledge is often resident in the engineer of the production. Therefore, the situation where the new processes of production are used will be often important part to make sure that the design engineers work close by with the engineers of the production.

Between new processes of manufacture, the development of the automatic techniques of the assembly has been mentioned frequently as to require of high level of integration between the design and manufacture. The new processes of manufacture are being developed continuously. Each new manufacturing process requires the close collaboration between the designer and the manufacturing engineer

**3. Lead Time**

One of the first motivations for a concurrent engineering approach to the product development is a desire to shorten the total time that takes to bring a product to the market. The notion that the length of the development cycle is an important competitive advantage and that the direction of all the aspects of the problem of the design could take at the same time as a shortened development cycle is a rule of many years. In summary, the claim reasons of the necessity of the integration of the economic competition is the new processes of production, and the shortening implementation time are not new.

**III. CONCURRENT ENGINEERING (CE) VS SEQUENTIAL ENGINEERING (SE)**

The method where each design phase mostly starts, when the previous one has been completed, is called sequential engineering’ (SE), as shown in Fig. 1. The SE can also be defined as a process, in which different stages such as customer investigation, product design specification, detail design, manufacturing, and testing are separately and sequentially conducted (Portioli-Staudacher et al., 2003). Therefore, some problems which may arise during product development process may cause the need for the product to be redesigned and this redesigning activity will increase development time and cost of the product (Bhuiyan et al., 2006). Moreover, a critical issue in this approach is how much the requirements and design have been modified in order to be finally accepted for manufacturing and production. These factors will weaken the competitiveness of products (Kamrani and Vijayan, 2006).

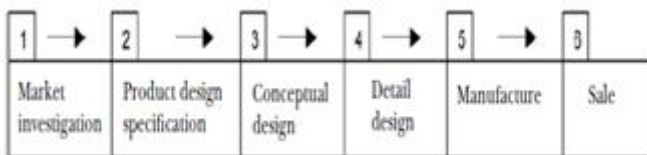


Fig. 1. Steps in Product development process with Serial Engineering

In order to improve the efficiency of the product development process, CE approach must be implemented; this is shown in Fig. 2. In this method, all the activities in the product development process are integrated and run in parallel with the feedback when needed, and the information and CE tools continuously flow along with all the activities in the product development process.

A recent study carried out by Bhuiyan et al. (2006), by means of comparison between the CE and SE projects in terms of process, tools and technology, communication, time

to market, project performance, etc., showed that the use of the CE project was more successful than the SE project at Telkom, where tremendous improvements in terms of time to market, project development, cost and product quality were achieved.

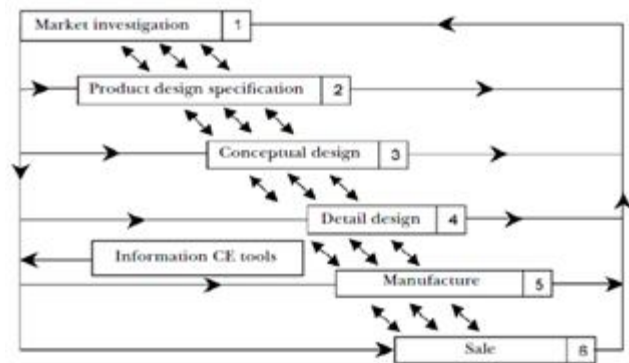


Fig. 2. Steps in product development process with CE environment

**IV. PRINCIPLES OF CONCURRENT ENGINEERING**

In general, CE principle can be divided into three key factors which can contribute to time reduction, cost reduction, improve product quality and fulfill customer’s need, as shown in Fig. 3.(Portioli-Staudacher et al., 2003; Kalkowska et al., 2005).

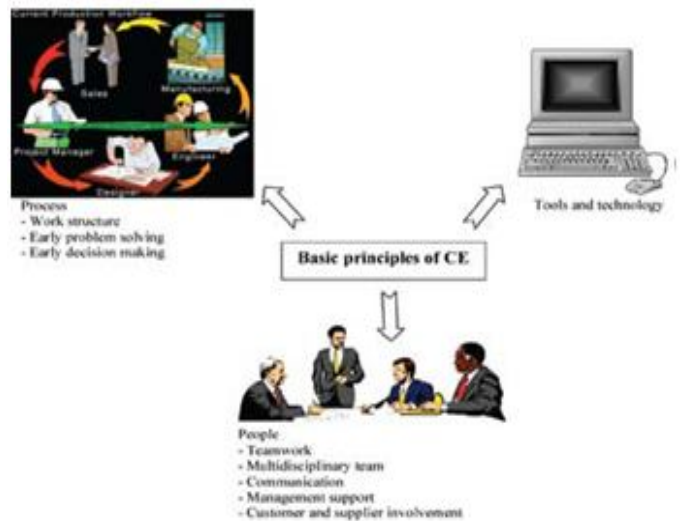


Fig. 3. Basic principles of CE

**1. People :**

In the CE approach, utilizing the appropriate human resource at the right time is critical and it accelerates development by keeping rework to a minimum. To be successful in CE implementation requires some factors have to be considered as follows:

**i) Teamwork :**

Team work is the basic principle of the CE (Lettice et al., 1995; Kusar et al., 2004). Teamwork emphasizes interpersonal relationship, cooperation, negotiation and collaboration decision making. Teamwork is an integral part of CE, as it represents the means for organizational integration.

#### ii) Multidisciplinary teams :

CE is based on multidisciplinary product development team. Multidisciplinary teams, involving experts from all stages of the product development process such as design, process, production, marketing, manufacturing, etc., are very important in order to succeed in CE implementation. Multidisciplinary teams can break down the barriers between departments and provide effective means of communications.

#### iii) Communication :

Communication is the basic principle for success in CE. Teams will work better if they know what other members are doing. Team members have regular meetings which allow fast and efficient exchange of information (Kusar et al., 2004). Communication between suppliers, customers and manufacturer is also a basic principle in the implementation of CE at the early stage of product development process (Portioli-Staudacher et al., 2003; Hamid et al., 2005). However, according to Bhuiyan et al. (2006), less communication can result in less time spent and lower the potential for confusion.

#### iv) Management Support :

According to Abdalla (1999), the main problem during practicing CE was the commitment of management in implementing CE. Thus, the lead and support from the top management is important to realize the implementation of a successful CE. The top management must not only support the CE initiative, but also actively participate in formulating and implementing the CE goals.

#### v) The Involvement of Customers and Suppliers :

In designing and manufacturing a product, the integration between the customers, suppliers and manufacturer is essential in determining the success of a product. This CE principle can reduce a significant portion of design error and rework due to misunderstandings or miscommunication between the company, the customers, and the suppliers, at the early stage of product development process.

## 2. Process :

A key in implementing the CE approach is to have a single well-defined process with clear ownership and goals. Thus, the process and the related schedule of activities must be based on some basic principles, as follows:

#### i) Work structure :

In general, all activities in product development process must be performed in a parallel and simultaneous approach. In order to construct a clear work structure or framework, some factors have to be worked out such as defining and formalizing the CE process, defining overlapping activities, identifying process ownership and setting goals clearly.

#### ii) Early Problem Discovery :

Problems which are discovered at the early stage of the product development process (particularly during the first 20% of the cycle time) are easier to solve than those which are discovered later.

#### iii) Early Decision Making :

The 'window of opportunity' to affect a design is much wider during an early design stage than in a later stage, i.e. when some of the decisions are frozen and the design is matured.

## 3. Tools and Technology :

An appropriate set of tools and technology should be chosen to help achieve the maximum benefits which enable integrated product development. For an effective CE implementation to be accomplished, the use of tools and technology is greatly required. However, there are two aspects which need to be considered when implementing the tools and technology; firstly, the tools and technology which enable an effective implementation of CE need to be identified, and secondly, people who will use these tools and technologies should be trained.

## V. PRODUCT DEVELOPMENT PROCESS WITH CONCURRENT ENGINEERING

Concurrent engineering (CE) is a very important concept in the world of new product development. It is a methodology used for creating timely products, while maintaining the highest quality, lowest cost and most customers' satisfaction. In conventional product development, activities such as market investigation, product design specification, conceptual design, detail design, manufacturing

and sales are sequentially performed and the trend is to complete 100% of each stage before performing the next. In this approach, a large number of modifications have to be made in the later stages of the product development process. Consequently, this can contribute to the increase in the time and cost involved in the product development process. Meanwhile, CE is a systematic approach to integrate all the design activities, and it provides a framework to make changes in design.

Basically, product development process is a process for translating customers' requirements into product design and manufacturing. Product development process provides a roadmap to designers for the activities or processes and deliverable required in designing, developing and manufacturing a particular product. The main objectives of a product development process are to minimize the life-cycle cost, maximize product quality, as well as maximize customers' satisfaction, maximize flexibility and minimize lead time (Mazumdar, 2002). Product development process can be categorized into two main processes, firstly, deal with development of a product and secondly, deal with its production (Kusar et al., 2004). However, this paper only describes the development of a product, which is initially started from market investigation up to the detail in the designing stage.

In the literature, there has been no standard product development process or designing process in the context of the CE environment. Nevertheless, various product development processes, within a CE environment, have been developed and proposed in the literature. These models are intended to be general and aim to guide designers to traverse a series of design stages and carry out a number of design activities in order to understand and solve design problems. These models are included under the umbrella of CE.

The design flow of the product development process used in this research was based on the total design method or the Pugh's method (Pugh, 1991). This method has widely been used by most designers or researchers in developing a new product or automotive components. However, this method does not specifically show development in terms of the CE tools needed, but are rather descriptive of design activities; whereas, the CE tools and its flow are key elements which must really be addressed in the product development process in the CE environment. Sapuan (1996) criticized on the sequential flow of the designing process and stressed that the concept of CE must be implemented in a clear manner in this method.

There are some examples which show the importance of addressing the use of the CE tools in product development

process under the CE environment in the literature. Among others, Sapuan (1998) developed a concurrent engineering design system for polymeric-based composites automotive components. The proposed model allows users' requirements to be identified, generates various design concepts and its evaluation; based on which, the chosen design is then optimized for manufacturing assembly. Thus, it has been proven that the CE tools should be clearly addressed at every stage of product development process under the CE environment.

A literature review of the existing studies shows the importance of addressing the CE tools in product development process, and none of the above researchers have addressed the use of the CE tools in their proposed product development process, i.e. starting from market investigation until the detail in the designing stage. To overcome these limitations, this report proposed a model which could provide some basic steps in the CE tools required, starting from market investigation to detail design in order to assist design teams to perform their design activities more effectively and efficiently.

## **VI. THE PROPOSED MODIFICATION OF THE MODELLING OF CONCURRENT ENGINEERING SYSTEM IN PRODUCT DEVELOPMENT PROCESS**

Product development process can be further divided into two main processes; firstly, it deals with the development of a product and secondly, it deals with its production (Kusar et al., 2004). It has generally been known that approximately 80% of the manufacturing cost of a product is determined by the design of the product (Mikkola and Skjoett-Larsen, 2003).

Thus, this paper only describes the development of a product which is started from market investigation to detail design. Fig. 4. shows the product development process being practiced by most manufacturers; this process does not specifically show development in terms of the CE tools needed, but it is rather a description of the design activities. Meanwhile, the CE tools and their flow are key elements which must really be addressed in the product development process in the CE environment.

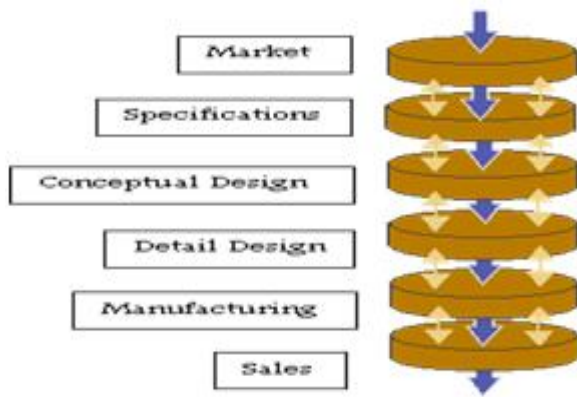


Fig. 4. Total design activity model

The proposed model of product development process in the CE environment is shown in Fig. 5. Several CE tools should be addressed and implemented to produce a product with good quality. Typically, all designing phases in this model are operated in parallel, simultaneously and iteratively but systematically operating within the design phase will minimize unnecessary iteration. From this proposed model, those who are involved in the product development process - begin with market investigation and end with detail design - will be able to understand the process flow of the product development in the CE environment. The proposed product development process, in the CE environment process, consists of four main phases, as follows:

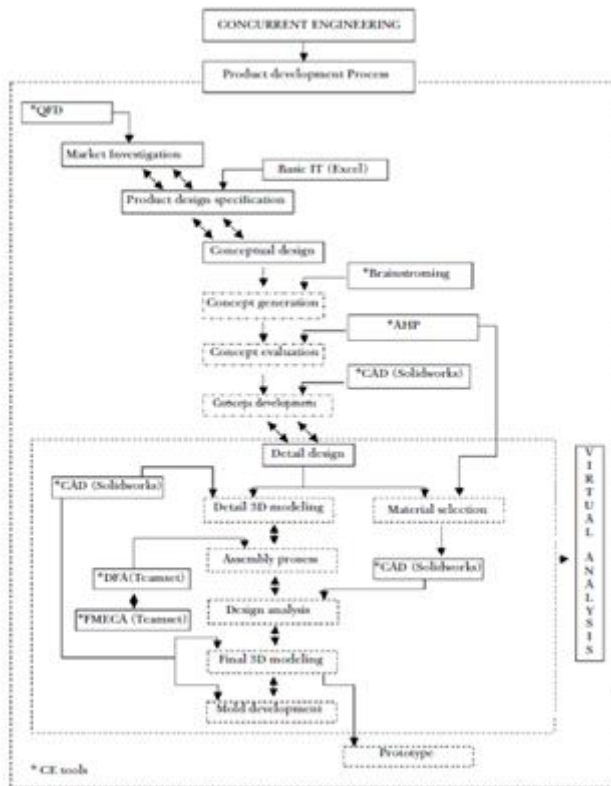


Fig.5. Proposed product development process with CE environment

**i) Market investigation :**

Market investigation phase is the first step in product development process and it is essential in determining the success of a product. There are many products which have been reported as unsuccessful in the marketplace because they do not meet the customers’ expectation (Cooper, 2003). It is necessary to implement a tool which can ensure a better understanding of the customers’ needs and requirements. One of the useful and familiar methods is quality function deployment (QFD) (Hsiao, 2002; Chen and Yang, 2004). QFD is a customer oriented approach to product development. It supports design teams in developing new products in a structured way, based on the assessment of customers’ needs.

**ii) Product Design Specification (PDS) :**

The design specification or product design specification (PDS) is constructed after analyzing the marketplace and customers’ needs. PSD is a document prepared early in the product development process; it sets out the requirements which the design will have to satisfy. In a way, PDS acts as the control for the total design activity because it places the boundaries on the subsequent designs (Pugh, 1991). As PDS is a control document, basic computer applications have to be employed.

**iii) Conceptual Design :**

Conceptual design is carried out within the envelope of the PDS. The conceptual design phase is more essential as compared to other design phases in product development process. This is because it forms the background work and involves many complex evaluation and decision making tasks (Sapuan, 2005a; Xu et al., 2007) at this stage. In general, conceptual design consists of three steps; these are concept generation, concept evaluation and concept development.

**– Concept Generation**

One of the tools which can generate ideas to meet the PDS is brainstorming. This method involves generating ideas, which is typically done in small groups. By the end of a brainstorming session, there will be a list of ideas, most useless, but some may have the potential to be developed into a concept. This brainstorming session can work better if the most of the teams have different areas of expertise.

**– Concept Evaluation**

Once a suitable number of concepts have been generated, it is necessary to choose the most suitable design or alternative to fulfil the requirement to set out the PDS. There are many useful tools to be used in evaluating and making the best decision; these include expert system, fuzzy logic, neural network, analytical hierarchy process, etc. In the concept development phase, the chosen concept or alternative can be further developed in detail.

#### – Concept Development

After evaluating and decision making have been accomplished, the product should be developed in detail. At this phase, the CE tool such as the computer aided design (CAD) is essential and it must be implemented actively. The chosen concept design is designed in detail, by considering all the dimensions and specifications until the final design is carried out.

#### iv) Detail Design :

At this phase, 3D modelling must go through five processes before the product can be manufactured. This 3D modelling and material selection analysis must be performed simultaneously, as shown in Fig. 5. The CE tools (such as computer aided design, or CAD) have to be applied so as to create a detail 3D modelling and for design analysis purposes.

The products which have a number of parts must be analyzed using design for assembly (DFA) method in order to reduce the number of parts which are not necessary to be manufactured. After that, the product will be analyzed by employing failure mode effects critical analysis (FMECA) to evaluate the potential failure of a particular product or process. Based on the results gathered from the material selection, the 3D modelling must be analyzed to ensure the selected material is able to be manufactured easily. Then, the final detail of the 3D modeling, using the CAD, will be carried out once the design analysis is completed. Finally, the mould design of the product will be developed using the CAD applications. Generally, all the processes in the detail design phase are known as the virtual analysis because all these designing aspects can be simulated and analyzed using design simulation software.

### VII. ADVANTAGES OF CONCURRENT ENGINEERING

- **Faster time to Market :** Concurrent engineering allows workers on several stages to work simultaneously, shortening the time to market.

- **Enhanced Quality :** Concurrent engineering practices also enable workers and managers to discover any production issues earlier in the process, which leads to a higher-quality product.
- **Lower Development Cost :** The bulk of a company's costs associated with creating a new product involve the design and development processes. Managers can use concurrent engineering as a powerful tool for reducing those early development costs. Since concurrent engineering practices decrease the time spent in the design and development phases, companies can deliver a product faster, better and cheaper than their competitors.
- **Increased Productivity :** While consecutive engineering requires that workers on a later stage wait for those in earlier stages, concurrent engineering allows workers the opportunity to be productive immediately and throughout the process. This process allows workers to focus on the project as a whole, rather than focus solely on their area of specialty.

### VIII. APPLICATIONS OF CONCURRENT ENGINEERING

- An example of the use of Concurrent Engineering can be found in General Electric's Aircraft Engines Division's approach for the development of the engine for the new F/A-18E/F. It used several collocated, multi-functional design and development teams to merge the design and manufacturing process. The teams achieved 20% to 60% reductions in design and procurement cycle times during the full-scale component tests which preceded full engine testing. Problems surfaced earlier and were dealt with more efficiently than they would have been with the traditional development process. Cycle times in the design and fabrication of some components have dropped from an estimated 22 weeks to 3 weeks.
- Another example concerns Boeing's Ballistic Systems Division where Concurrent Engineering was used in 1988 to develop a mobile launcher for the MX missile and was able to reduce design time by 40% and cost by 10% in building the prototype.
- Polaroid Corp.'s Captiva instant camera is also the result of a Concurrent Engineering approach, as a result of which Polaroid was able to make literally hundreds of working prototypes. Throughout the process, development was handled by cross-functional teams.
- The aeronautical systems group at "Lockheed Corporation" recently developed and integrated of Corporation called "Calfab". This mini-factory uses the automated disposition and the manufacture and has shortened the time that takes for the design and the manufacture of metal pieces of leaf as of 52 days 2 days -

a reduction of the 96 percent. Used metal to travel 2500 feet between the several machines and now travels only 150 feet. There are few lazy manufacturing companies that have not pointed at least a reduction of the 50 percent in the time that takes to send a new product of the idea to the production.

### IX. REQUIREMENTS OF CONCURRENT ENGINEERING TO BE VIABLE

- Overcoming Traditional Barriers
- Teamwork Development and Interaction
- Involvement of Outside Influences
- Co-evolution
- Continual Improvement
- Information Sharing and Management
- Togetherness
- Integration of frameworks and Tools
- Empower
- Develop a Clear Vision of the Future Environment
- Top Management Support

### X. CONCLUSION

This research supports the claims that CE is very important in product development process. The application of the CE concept and its tools in the product development process can help the designers to manufacture products more efficiently and effectively. The firms which have been implementing CE tool in their product development have gained tremendous benefits, particularly in terms of reducing cost incurred, reducing time for product development process, improving product quality and fulfilling customers' requirements. Moreover, some design uncertainties can be reduced using this method, and the product can be designed in a more transparent process. Making Concurrent Engineering a success is really a management issue. If management doesn't get it right then it's not going to matter much whether EDM/PDM is used or not. On the other hand, EDM/PDM can provide valuable support to a successful implementation of Concurrent Engineering.

### ACKNOWLEDGMENT

I would like to thank the many people who have helped me along this journey. First to my guide Mr. Sourabh Borchate sir, assistant professor at Dr. D. Y. Patil Institute of Engineering, Management and Research, Akurdi, Pune and Mr. K. Narkar sir, HOD of Mechanical Department at Dr. D. Y. Patil Institute of Engineering, Management and Research,

Akurdi, Pune for their academic support as well as giving me academic freedom in research direction.

### REFERENCES

- [1] Abdalla, H.S. (1999). Concurrent engineering for global manufacturing. *Journal of Production Economics*, 60-61, 251-260.
- [2] Bowonder, B. and Miyake, T. (1993). Japanese innovations in advanced technologies: An analysis of functional integration. *Journal of Technology Management*, 8(2), 135-156.
- [3] Cooper, L.P. (2003). A research agenda to reduce risk in new product development through knowledge management: A practitioner's perspective. *Journal of Engineering and Technological Management*, 20(1-2), 117-140.
- [4] R. A. Sprague, K. J. Singh and R. T. Wood (Mar '91). Concurrent engineering in product development. *IEEE DESIGN AND TEST OF COMPUTERS*, pp 6-13.
- [5] Curran, R., Price, M., Raghunathan, S., Benard, E., Crosby, S., Castagne, S. and Mawhinney, P. (2005). Integrating aircraft cost modelling into conceptual design. *Journal of Concurrent Engineering*, 13(4), 321-330.
- [6] Junjie, X., Xiaolan, J., Zhong, W. and Huahui, C. (2006). Research on green design of complex product based on concurrent engineering. *International Conference on Computer-aided Industrial Design Conceptual Design* (p. 1-5). China.
- [7] Pugh, S. (1991). *Total Design: Integrated Methods for Successful Product Engineering*. Wokingham, England: Addison Wesley Limited.
- [8] Rozlina, M.S., Shahroun, A.M., Tap, M.M. and Ishak, N. (2004). A new approach towards achieving total product design from concept to manufacture. In *Proceeding of ICPDD 2004 the 1st International Conference on Product Design and Development*, 20-24 December, Kota Kinabalu, Sabah.
- [9] Tummalapudi, V.M.R., Chin, K.S. and Ho, S.H. (1997). Assessing success factors for implementing concurrent engineering a case study in Hong Kong electronics industry by analytical hierarchy process. *International Journal of Production Economics*, 49(3), 265-283.



- [10] Winner, R.I., Pennel, J.P., Bertrend, H.E. and Slussarczuk, M.M.G. (1988). The role Concurrent Engineering in weapon system Acquisition. IDA report R-338. Alexandria, VA: Institute for Defense Analyses.