

Experimental Analysis of Nano – Fluids(Al_2O_3 & Sio_2)Through Double Pipe Heat Exchanger

Sk Abdul Azeez¹, Raffi Mohammed², A. Rahul Kumar³, B. Narendra Kumar⁴, Y. Venkatesh⁵

^{1,2,3,4,5} Dept of Mechanical Engineering

^{1,2,3,4,5} Ramachandra college of Engineering, Eluru, A.P

Abstract- In this research work forced convection flows of nano-fluids consisting of water with nanoparticles Al_2O_3 and SIO_2 in a horizontal tube with constant wall temperature are investigated numerically. A single-phase model having two-dimensional equations is employed with either constant or temperature dependent properties to study the hydrodynamics and thermal behaviors of the nano-fluid flow. The velocity and temperature vectors are presented in the entrance and fully developed region. The variations of the fluid temperature, local heat transfer coefficient and pressure drop along tube length are shown in the paper. Effects of nanoparticles concentration and heat transfer coefficient are presented. Numerical results show the heat transfer enhancement due to presence of the nanoparticles in the fluid in accordance with the results of the experimental study used for the validation process of the numerical model.

Keywords- CSTR-PID-ZN-Fuzzy-MRAM-MATLAB.

I. NANO FLUID PREPARATION METHOD

1.1 Two-Step Method

This is the most widely used method for preparing Nano fluids. Nanoparticles, Nano fibers, nanotubes, and other nanomaterials used in this method are first produced as dry powders by chemical or physical methods. After that the Nano sized powder is to be dispersed into a fluid in the second processing step with the help of intensive magnetic force agitation, ultrasonic agitation, high-shear mixing, homogenizing, and ball milling. Two-step method is the most economic method to produce Nano fluids in large scale, because Nano powder synthesis techniques have already been scaled up to industrial production levels. Due to the high surface area and surface activity, nanoparticles have the tendency to aggregate. The important technique to enhance the stability of nanoparticles in fluids is the use of surfactants. However, the functionality of the surfactants under high temperature is also a big concern, especially for high-

temperature

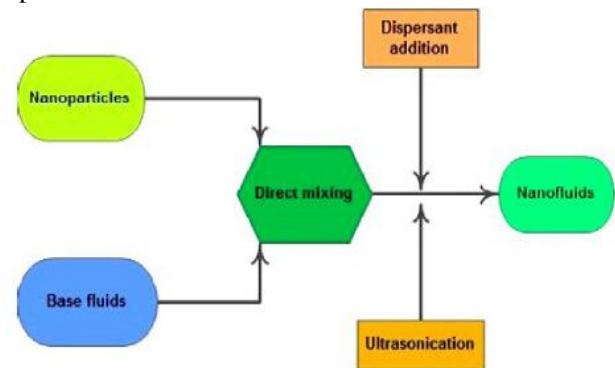


Fig1.1.1 Two-Step Mixing Procedure Diagram of Nano-Fluid

Due to the difficulty in preparing stable Nano fluids by two-step method, several advanced techniques are developed to produce Nano fluids, in one-step method.

1.2 One-Step Method

To reduce the agglomeration of nanoparticles, Eastman et al. developed a one-step physical vapor condensation method to prepare (Al_2O_3 +water and SiO_2 +water) Nano fluids. The one-step process consists of simultaneously making and dispersing the particles in the fluid. In this method, the processes of drying, storage, transportation, and dispersion of nanoparticles are avoided, so the agglomeration of nanoparticles are minimized, and the stability of fluids are increased. The one-step processes can prepare uniformly dispersed nanoparticles, and the particles are suspended in the base fluid. The vacuum-SANSS (submerged arc nanoparticle synthesis system) is another efficient method to prepare Nano fluids using different dielectric liquids. The different morphologies are mainly influenced and determined by various thermal conductivity properties of the dielectric liquids. The prepared nanoparticles exhibit needle-like, polygonal, square, and circular morphological shapes. The method avoids the undesired particle aggregation fairly well. One-step physical method

cannot synthesize Nano fluids in large scale, and the cost is also high, so the one-step chemical method is developing rapidly. Zhu et al. presented a novel one –step chemical method for preparing copper Nano fluids by reducing $CuSO_4 \cdot 5H_2O$ with $NaH_2PO_2 \cdot H_2O$ in ethylene glycol under microwave irradiation Well-dispersed and stably suspended copper Nano fluids were obtained. Mineral oil-based Nano fluids containing silver nanoparticles with a narrow-size distribution were also prepared by this method the particles could be stabilized by Koran tin, which coordinated to the silver particle surfaces via two oxygen atoms forming a dense layer around the particles. The silver nanoparticle suspensions were stable for about 1 month. Stable ethanol-based Nano fluids containing silver nanoparticles could be prepared by microwave-assisted one-step method .In this method, polyvinylpyrrolidone (PVP) was employed as the stabilizer of colloidal silver and reducing agent for silver in solution. The cationic surfactant octadecylamine (ODA) is also an efficient phase-transfer agent to synthesize silver colloids the phase transfer of the silver nanoparticles arises due to coupling of the silver nanoparticles with the ODA molecules present in organic phase via either coordination bond formation or weak covalent interaction. Phase transfer method has been developed for preparing homogeneous and stable graphene oxide colloids. Graphene oxide Nano sheets (GONs) were successfully transferred from water to n-octane after modification by oleylamine.

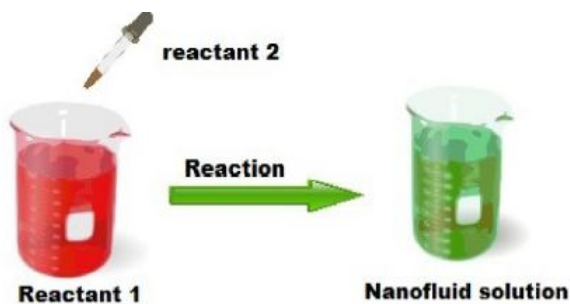


Fig1.1.2 One-Step Mixing procedure of Nano-Fluid

II. EXPERIMENTAL WORK

2.1 OBJECTIVE

To study the overall heat transfer co-efficient & effectiveness of the heat exchanger by using Nano fluids and making a comparison with base fluid as water at different flow rates.

2.2 INTRODUCTION

Heat exchanger is a device in which heat is transferred from one fluid to another. The necessity for doing

this arises in a multitude of industrial applications. Common examples of heat exchangers are the radiator of a car, the condenser at the back of a domestic refrigerator and the steam boiler of a thermal power plant.

Heat exchangers are classified in three categories:

- Transfer Type.
- Storage Type.
- Direct Contact Type

2.3 THEORY

A transfer type of heat exchanger is one on which both fluids pass simultaneously through the device and heat is transferred through separating walls. In practice most of the heat exchangers used are transfer type.

The transfer type exchangers are further classified according to flow arrangement as

- Parallel flow in which fluids flow in the same direction.
- Counter flow in which fluids flow in the opposite direction.
- Cross flow in which they flow at right angles to each other.

A simple example of transfer type of heat exchanger in the form of a tube type arrangement in which one of the fluids are flowing through the inner tube and other through the annulus surrounding it. The heat transfer takes place across the walls of the inner tube.

Heat transfer rate, LMTD and overall heat transfer coefficient can be calculated as follows:

$$Q = M C_p (T_o - T_i)$$

$$\Delta T_m = \frac{\Delta T_o - \Delta T_i}{\ln \frac{\Delta T_o}{\Delta T_i}}$$

$$U = \frac{Q}{A \Delta T_m}$$

Where Q is amount of heat transfer, U is overall heat transfer coefficient and ΔT_m is log mean temperature difference. M, T_o , T_i are mass flow rate, outlet temperature and inlet temperature respectively. ΔT_o , ΔT_i outlet temperature difference, inlet temperature difference and heat transfer area respectively.



Fig3.3 Double pipe Heat Exchanger apparatus

2.4 DESCRIPTION

The apparatus consists of a concentric tube heat exchanger. The hot water flows through inner tube and cold water flows through outer tubes. Direction of cold fluid flow can be changed from parallel or counter to hot water so that unit can be operated as parallel or counter flow heat exchanger. For flow measurement Rota meters are provided. A magnetic drive pump is used to circulate the hot water from a recycled type water tank, which is fitted with heaters and digital temperature controller.

2.5 UTILITIES REQUIRED

- Electricity Supply: Single phase, 220 V AC, 50 Hz, 5-15 Amp combined socket with earth connection.
- Water Supply: Continuous 5 LPM at 1 Bar.
- Floor drain required.
- Bench area required: 1.75m × 0.5m.

2.6 EXPERIMENTAL PROCEDURE:

1. First switch ON the unit panel.
2. Start the flow of cold water through the annulus and run the exchanger as counter flow or parallel flow.
3. Switch ON the geyser provided on the panel & allow to flow through the inner tube by regulating the valve.
4. Adjust the flow rate of hot water and cold water by using valves.
5. keep the flow rate same till steady state conditions are reached.
6. Note down the temperatures on hot and cold water sides. Also note the Keep flow rate.

7. Repeat the experiment for different flow rates and for different temperatures.

2.7 PRECAUTIONS & MAINTENANCE INSTRUCTIONS:

- Never run the apparatus if power supply is less than 200 volts and more than 230 volts.
- Never switch ON mains power supply before ensuring that all the ON/OFF switches given on the panel are at OFF position.
- Operator selector switch OFF temperature indicator gently.
- Always keep the apparatus free from dust.

1.3 HEAT EXCHANGER

Heat exchanger is nothing but a device which transfers the energy from a hot fluid medium to a cold fluid medium with maximum rate, minimum investment and low running costs.

1.3.1 History of heat exchanger

In the 1950s, aluminum heat exchangers made moderate in the automobile industry with the invention of the vacuum brazing technique, large scale production of aluminum-based heat exchangers began to raise and grow resulting from advantages of the controlled atmosphere brazing process (Nicolabrazing process introduced by ALCAN). With increasing year's introduction of "long life" (highly corrosion resistant) alloys further improved performance characteristics of aluminum heat exchangers. Extra demands for aluminum heat exchangers increased mainly due to the growth of automobile air-conditioning systems.

1.3.2 About heat exchanger

The heat transfer in a heat exchanger involves convection on each side of fluid and conduction taking place through the wall which is separating the two fluids. In a heat exchanger, the temperature of fluid keeps on changing as it passes through the tubes and also the temperature of the dividing wall located between the fluids varies along the length of heat exchanger.

Examples:

- Boilers, super heaters, reheaters, air preheaters.
- Radiators of an automobile.
- Oil coolers of heat engine.
- Refrigeration of gas turbine power plant.

- In waste heat recovery system.

Types:

Based on contact

1. Direct contact type of heat exchanger,
2. Non-contact type of heat exchanger.

Based on direction of flow

Direction of motion of fluid:

1. Parallel flow,
2. Counter flow
3. Mixed flow.

III. RESULTS AND DISCUSSION

3.1 Result: comparison between nano fluids (Al₂O₃+water and SiO₂+water) and water

Flow rate kg/s ec	Overall heat transfer coefficient W/m ² -k	Water		Al ₂ O ₃ (0.2% volume concentration)		SiO ₂ (0.2% volume concentration)	
		Parallel	Counter	Parallel	Counter	Parallel	Counter
50	U _o	591.89	773.604	676.511	857.06	703.54	850.11
100	U _o	1202.083	1572.057	1412.77	1776.74	1476.84	1830.77

Table 6.1 comparison between nano fluids (Al₂O₃+water and SiO₂+water) and water

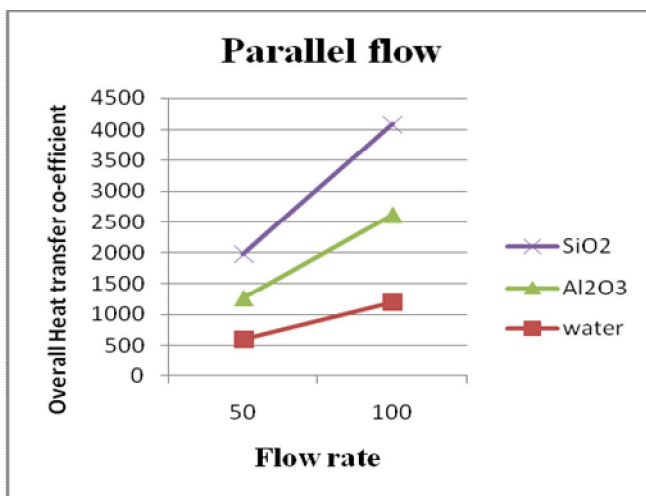


fig 6.1a parallel flow rate vs overall heat transfer co-efficient

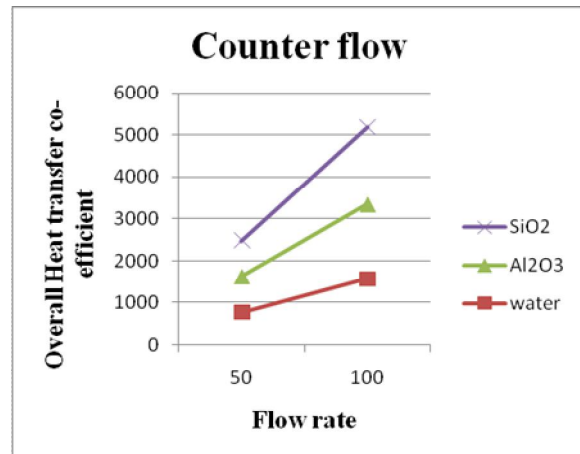


fig 6.1b counter flow rate vs overall heat transfer co-efficient

From the above results which we have obtained shows that the heat transfer rate and overall heat transfer co-efficient increases by using nano fluids

IV. CONCLUSION

From the above experimental analysis we are going to say that by using Nano fluids in the heat exchangers we can improve the overall heat transfer co-efficient due to the thermal properties of nano powders.so that the efficiency of the heat exchanger can be increased.

REFERENCES

- [1] Keblinst.P, Eastman.J.A and Cahill.D.G, "Nano fluids for Thermal Transport" Materials Today, 8 (2005), 6, pp. 36-44.
- [2] Eastman J.A, Choi S.U.S, Li. S, Yu.W and Thompson L.J. "Anomalous increased Effective thermal conductivities of ethylene glycol-based nanofluids conducting copper nanoparticles." Applied Physics Letters. 78(2001), 6, pp. 718-720.
- [3] Das. S.K. Putra.N and Roetzel .W. "Pool Boiling Characteristics of Nano fluids". International Journal of Heat and Mass transfer, 46 (2003), 5, pp. 851-862.
- [4] Eastman.J.A, Cho.S.U.S, Li.S and Thompson.L.J, and Dimelfi.R.J, "Thermal properties of Nano structured materials", Journal of Metastable Nano Crystalline Materials, 2 (1998), pp. 629 – 637.
- [5] Tran.P.X and Soong.Y, "Preparation of nanofluids using laser ablation in liquid technique", ASME Applied Mechanics and Material Conference, Austin, TX – 2007.
- [6] Patel.H.E, Das.S.K, Sundarajan.T, Sreekumaran.Nair.A, George.B and Pradeep.T, "Thermal conductivities of naked and manolayer protected metal nanoparticle based

- Nanofluids, Manifestation of anomalous enhancement and chemical effects”, *Applied Physics Letters*, 83(2003), 14, pp. 2931 – 2933.
- [7] Zhu.H, Lin.Y and Yin.Y, “A novel one step chemical method for preparation of copper Nanofluids”, *Journal of Colloid and Interface Science*, 277 (2004), 1, pp. 100 – 103.
- [8] Yu W, France DM, Routbort JL, Choi SUS: Review and comparison of nanofluid thermal conductivity and heat transfer enhancements. *Heat Transfer Eng* 2008, 29:432-460.
- [9] D.B.Tuckerman and R.F.W.Pease “High performance heat sinking for VLSI” *IEEE electron device letter*. Vol2, Number 5, 1981, pp 126-129
- [10] X. W. Wang, X. F. Xu and S. UConductivity of Nanoparticle-Fluid mixture,“ *Journal of Thermophysics and Heat Transfer*, Vol. 13, No. 4, 1999, pp. 474-480.
- [11] S. Lee, S. U. S. Choi, S. Li and J. A. Estman, “Measuring Thermal Conductivity of fluid containing Oxide Nanoparticles,” *Journal of Heat Transfer*, Vol. 121, No. 2, 1999, pp. 280-289.
- [12] B.-X.Wang, L.-P.Zhou and X.-F. Peng, “A Fractal Model for Predicting the Effective Thermal Conductivity Liquid with Suspension of Nanoparticles, ”*International Journal of Heat and Mass Transfer*, Vol. 46, No. 14, 2003, pp. 2665-2672.
- [13] J. Koo and C. Kleinstreuer, “A New Thermal Conductivity Model for Nanofluids,” *Journal of Nanoparticle Resea* Vol. 6, No. 6, 2004, pp. 577-58813.
- [14] Q. Li and Y. M. Xuan, “Convective Heat transfer and Flow Characteristics of Cu -Water Nano fluid,” *science in China Series E: Technological Sciences*, Vol. 45, No. 4, 2002, pp. 408-416.
- [15] Y. M. Xuan and Q. Li, “Investigation on Convective Heat Transfer and Flow Feartures of Nanofluids,” *Journal of Heat Transfer*, Vol. 125, No. 1, 2003, pp. 151-155
- [16] B. C. Pak and Y. I. Cho, “Hydrodynamic and Heat Transfer Study of Dispersed Fluids with Submicron Metallic Oxide Particles,” *Experimental Heat Transfer*, Vol. 11, No. 2, 1998, pp. 151- 170.
- [17] D. S. Wen and Y. L. Ding, “Experimental Investigation into Convective Heat Transfer of Nanofluids at the Entrance Region under Laminar Flow Conditions,”