

# Implementation of Live Video Broadcasting Over Software Defined Networking

Archana.J<sup>1</sup>, Shrinidhi.V<sup>2</sup>, S.R.Sendhil Kumar<sup>3</sup>, R.K.Kapilavani<sup>4</sup>

Department of Computer Science and Engineering

<sup>1,2</sup> Student, Prince Shri Venkateshwara Padmavathy Engineering College

<sup>3,4</sup> Assistant Professor, Prince Shri Venkateshwara Padmavathy Engineering College

**Abstract-** *This paper proposes a methodology, which aims to improve the reliability of multimedia streaming while reducing the utilization of server resources. Software Defined Networking (SDN) posses a centralized SDN Controller enabled with OpenFlow protocol that monitors every node in the network. It optimizes video delivery using an algorithm (Scalable Video Coding) that sends layers of different bitrates via discrete paths. The optimal path is determined using LARAC algorithm. The OpenQoS can guarantee seamless video delivery with little or no video artifacts experienced by the end-users. HTML5 browser display embeds videos into the server. This allows everyone to access the media files irrespective of their platform, device, or browser. A powerful Apache Tomcat Web Server is deployed. Also guarantees the viewer with an alternative version of full functionality in case the less important segments are lost or discarded. It implements a resilient method for packet loss by utilizing independent paths. This transmits the multimedia files from one system to another connected over a distributed network.*

**Keywords-** Software Defined Networking (SDN), Quality of Service (QoS), OpenFlow, Open QoS, Scalable Video Coding (SVC), Lagrange Relaxation based Aggregate Cost (LARAC), Streaming

## I. INTRODUCTION

[18]The networking elements have been turn into a significant element in almost all human activity. So, there is increase in the number of devices as well as amount of traffic in network is exponentially growing. The new inventions need to change the inflexibility of traditional network. The key technique of SDN is OpenFlow, which provides additional configuration options in the data plane. The principle of communication between data plane and control plane is allowed by the OpenFlow design and also permits the complete network to be controlled through Application Programming Interface (API).The networking foundation together with Open ONF is committed for promoting and adopting OpenFlow specification.

[16]This realization of OpenFlow eliminate the drawbacks of severity of static protocols, open the possibility of fast Improvement and led research community to extend new paradigms. This paper presents an analysis of five policies such as route management, route discovery, traffic analysis, call admission and topology management.

[19]The fast failure recovery mechanism is implemented in OpenFlow which will competent of recovering from connection failure using different path. The control plane in SDN not only performs forwarding of packets but also link alteration at a data level infringement the difficulty of layering. So this leads to remuneration in Optimizing network configuration and enhancing network performance. It also provides network programmability and capability to identify isolated virtual networks by means of control plane.

## II. RELATED WORK

This section we discuss various proposed architectures, frameworks and routing algorithms based on SDN. These target various network aspects such as virtualization, scalability, Quality of service network management, programmability and service assurance[1].

Software Defined Networking (SDN)[3] is a networking paradigm where the control and the data plane are decoupled and is logically centralized and programmable through interfaces.

[3] QoS routing technique to optimize multimedia traffic dynamically based on the user needs is done by the implementation of LARAC algorithm.

[18] An optimization framework for the OpenFlow controller using scalable video coding algorithm provides QoS support for scalable video streaming. In this paper, the base layer of SVC encoded video is routed as a lossless-QoS flow, And also the enhancement

Layers are routed either as a lossy-QoS flow or as a best effort flow.

[11] Improving the routing implementation of software defined network is performed using Floodlight controller and the Dijkstra's algorithm is used for calculating the shortest path.

[12] An idea of performing optimized path assignment in software defined networking and to achieve the Quality of Experience by considering the quality of service parameters is by QoS Matching and Optimization Function (QMOF) and the Path Assignment Function (PAF).

[15] They proposed a design to apply the recent framework of Software Defined Networks (SDNs) to Cloud Gaming, and that framework reduces delay and jitter experienced by players.

### III. PROPOSED WORK

The key design goals for designing the proposed work are as follows:

To create an Open-flow enabled switches (laptops) for streaming the multimedia file.

To design an efficient routing algorithm to Guarantee route management and route calculation and A method for optimizing video delivery over SDN based on open flow.

In this section the method for encoding videos dynamically from the server-side to stream them over a network is performed. We have used HTML5 for encoding videos in the server side and PHP script on the server-side can now handle the HTTP range requests normally and the progress controls no longer freezes[2]. The video captured from webcam or any video file chosen are multi-casted over internet using HTTP. The video is fragmented using Scalable Video Coding algorithm that sends layers of different quality via discrete paths. Then, Setup a SDN network with four laptops which is connected through open-flow enabled switches. Optimal network connection is chosen to route fragments dynamically using LARAC algorithm. Stream the video over the HTTP response to the multiple devices by incorporating route management and route calculation[4]. The fragments are then combined to form proper visual format and the clients are provided with end-to-end QoS added to the controller for better live streaming of multimedia.

### IV. ARCHITECTURE

In this section, we present the main components of integrating multimedia services over SDN and how they are inter-related with one another. The Figure comprises multimedia services, a SDN controller, SVC encoder and decoder, client and server.

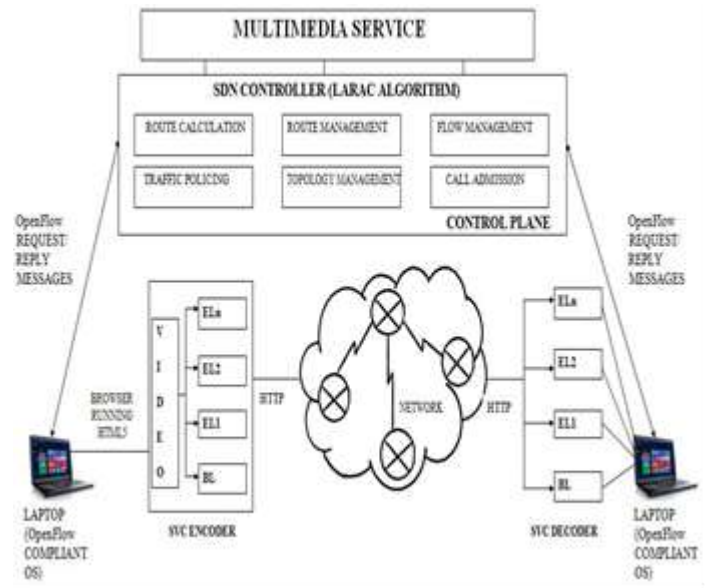


Fig. 1a

In the SDN controller the LARAC algorithm is implemented which manages six principles such as route management, route calculation, topology management, flow management, traffic policing and call admission. When the server receives request from client for video, the server will stream the video through a scalable video coding encoder which splits the input video sequence into complementary layers[5]. The layered structure of scalable video content can be distinct as the combination of a base layer and several additional enhancement layers. The base layer corresponds to the lowest supported video performance, whereas the enhancement layers allow for the refinement of the base layer. When a receiver in a slow-bandwidth network would receive only the base layer, hence producing a video (15 frames per second, labeled as fps)[7]. On the converse, the second receiver in a network with higher bandwidth can process and combine both layers, which yields a full-frame-rate (30 fps) video and eventually a smoother video. The SDN controller which is based on OpenFlow that allows server to tell where to send the packets the LARAC is used for finding the congested and uncongested path to produce a optimal path. SDN controller uses the OpenFlow reply/request messages to communicate with the server.

## V. STREAMING MULTIMEDIA

### A. NETWORK CREATION

In this module a sample network (torus network) is created in Mininet simulator. The torus network consists of switches at each corner. In this module, the controllers are decoupled which are residing along with data plane into a centralized SDN switch controller. Here 127.0.0.1(localhost) acts as the SDN controller. Every individual switches are then added to the controller and are globally managed by the controller. In this, the centralized controller can have access to all switches connected to it.

And, the switches are OpenFlow enabled. So, this whole network resembles to a Software defined network which results in reliable transmission of data packets. And then, the torus network is tested with multimedia streaming functions[6]. Intent is added with the source and destination. The network shows the optimal path between the source and destination. The same can be implemented in real network conditions. In this module, ONOS has to be initialized. A cubical network with 4x4 switches is constructed. Using mininet 64 switches are interlinked forming a visual pattern. Hosts are pinged with the switches.

Command for creating a torus network in mininet:

```
sudo mn --topo=torus,4,4--controller remote
```

### B. LARAC ALGORITHM IMPLEMENTATION

The LARAC algorithm is a very proficient approximation algorithm that make out the integer relaxation of the CSP problem (RELAX-CSP) and is a geometric approach. The purpose of a minimum cost path a source node to a destination node of a network to the condition that the total delay of the path be less than or equal to a specified value. The shortest path is calculated based on link costs[8]. The optimal path is obtained if delay constraint is met, or else algorithm provisions the path as the latest infeasible path. Then the shortest path is determined based on link delays. The SDN controller is a logical entity that monitors the OpenFlow enabled switches by sending OpenFlow FEATURE\_REQUEST and FEATURE\_REPLY messages. In this module, the feasible links are analyzed. The LARAC algorithm is used to find the path link where the shortest (minimum hops) is calculated. This path is concluded as the most efficient link for transfer of data packets between the switches. The flow table that contains all the possible links (paths) between the switches is maintained by a centralized controller. At the end of this module, an intent (Connection)

between the hosts is created. The controller has a buffer that stores the link statistics. The controller determines the optimal path specified in the flow table. If the current path is congested, then it finds the next optimal path. The congested path is in which 75% (or more) of the bandwidth is already utilized[9]. Using this LARAC algorithm, the optimal path is provided by the centralized controller to the switches where there is no congestion. In this optimal path there is no traffic and provides easy transmission of data packets to the switches.

### C. SET UP TO STREAM A VIDEO

Web server creation is performed by registering in Apache Tomcat Service. Configuring security groups is used to add IP addresses which forms a network to access the instance. The concept of a scalable video encoder is to split the single-stream video in a multi-stream flow, often referred to as layers. Scalable video coding (SVC) encoder encodes the input video sequence into complementary layers. So that receivers can choose and decode different number of layers each related to discrete video characteristics along with the processing constraints of both the network and the device. The layered structure of scalable video content can be distinct as the combination of a base layer and several additional enhancement layers[13]. The base layer conforms to the lowest supported video performance, while the enhancement layers allow for the refinement of the base layer. When a receiver in a slow-bandwidth network would receive only the base layer, hence producing a video (15 frames per second, labeled as fps). On the converse, the second receiver in a network with higher bandwidth can combine both layers and progress, which returns a full-frame-rate (30 fps) video and finally a smoother video. The addition of enhancement layers enhances the resolution of the decoded video sample, so when the supplementary layers are made accessible to the receiver, the high resolution of the decoded video and user's quality of experience is achieved[10].

### D. OPENQoS FOR DELAY AND JITTER REDUCTION

To optimize multimedia video delivery with little or no video artifacts by adding route management and calculation and traffic policing is done at earlier stages. The comparative study is performed to address the reduction in jitter, bandwidth and latency in SDN. The enhancement layer is requested by client based on the quality of video by performing SVC client implementation. If the client demands one base and two enhancement layers, then clients send an HTTP GET message to the corresponding ports of the server at the same time[14]. Hence, the client throughput is maximized since it does not have to wait downloading packets of a video layer to request

the next layer packets for a segment. In order to calculate throughput, a new method is formulated. Suppose the client request base and  $n$  enhancement layers. Let  $t_{dt}$  represents the total time to download base and these  $n$  enhancement layers. The calculation of throughput and  $t_{dt}$  for the requested segment is performed according to the formula given in (2) and (3), respectively. In the formulas,  $e_i$  represents the  $i$ th enhancement layer,  $b$  represents base layer.  $x_{last}$  is the receiving time of the last packet of  $x$ th layer,  $t_{request}$  is the sending time of the request and  $br_x$  is the bit-rate of the  $x$ th layer. This mainly focused on calculation of delay and jitter reduction. The comparison of Software Defined Network and the traditional network based on calculation of delay and jitter. Optimize multimedia video delivery with little or no video artifacts by adding route management and calculation and traffic policing. The client decides to request one base and two enhancement layers and send an HTTP GET message [3] the corresponding ports of the server at the same time. Hence, the client throughput will be maximized while it need not have to wait for downloading packets of a video layer to request the next layer packets for a segment.

## VI. CONCLUSION

Hence, in this paper we proposed a methodology to optimally stream video by restructuring SDN with enhanced services such as route management and route calculation etc. While comparing to the traditional network, we added functionalities to the software defined network by incorporating SVC and LARAC algorithm to minimize the delay and jitter in the network.

## REFERENCES

- [1] Jose M. Jimenez, Oscar Romero, Albert Rego, Avinash Dilendra, Jaime Lloret Universidad Politécnic de Valencia, "Study of Multimedia Delivery over Software Defined Networks" in Network Protocols and Algorithms ISSN 19433581 2015, Vol. 7, No. 4.
- [2] Harold Owens, Arjan Durresi, presented a paper titled, "Video over Software Defined Networking (VSDN)", Computer Networks 000 (2015) 1–16 Accepted 15 September 2015.
- [3] Hilmi E. Gilmez, S. T. Dane, K. T. Bagci, A.M. Tekalp, "OpenQoS: An OpenFlow controller design for multimedia delivery with end-to-end Quality of Service over Software-Defined Networks" Signal & Information Processing Association Annual Summit and Conference (APSIPA ASC), 3–6 Dec 2012, Asia-Pacific and Published by IEEE Explore.
- [4] Hilmi E. Gilmez, Burak Gorkemli, A. Murat Tekalp, Seyhan Civanlar presented a paper titled, "Scalable video streaming over OpenFlow networks: An optimization framework for QoS routing" in 18th IEEE International Conference, 2011.
- [5] Adnan Shahid, Jinan Fiaidhi and Sabah Mohammed presented a paper titled, "Implementing Innovative Routing Using Software Defined Networking (SDN) in International journal of multimedia and ubiquitous engineering, 2016.
- [6] Olivier Flauzac, Carlos Gonzalez, Florent Nolot "Developing a distributed software defined networking testbed for IoT" in The 7th International Conference on Ambient Systems, Networks and Technologies (ANT 2016).
- [7] L. Zuccaroa, F. Cimorellia, F. Delli Priscolia, C. Gori Giorgia, S. Monaco, V. Suracib\* "Distributed control in virtualized networks" in the 10th International Conference on Future Networks and Communications (FNC 2015).
- [8] Sajjad Ali Mushtaq, Naheed Sajjad, Sohail Razzaq, "Decision Making Framework with Stochastic Dynamicity: A Step Forward Towards SDN" in the 9th International Conference on Future Networks and Communications (FNC2014).
- [9] Ognjen Dobrijevic, Matija Santl, and Maja Matijasevic "Ant Colony Optimization for QoE-Centric Flow Routing in Software-Defined Networks".
- [10] Andreas Kessler<sup>1</sup>, Lea Skorin-Kapov<sup>2</sup>, Ognjen Dobrijevic<sup>2</sup>, Maja Matijasevic<sup>2</sup>, Peter Dely<sup>1</sup> "Towards QoE-driven Multimedia Service Negotiation and Path Optimization with Software Defined Networking".
- [11] Ehab Al-Shaer University of North Carolina at Charlotte, Charlotte, NC, USA Saed Al-Haj University of North Carolina at Charlotte, Charlotte, NC, USA "FlowChecker: configuration analysis and verification of federated openflow infrastructures".
- [12] Chenhui Xu, Bing Chen, and Hongyan Qian "Quality of Service Guaranteed Resource Management Dynamically in Software Defined Network".
- [13] Grzegorz Wilczewski Faculty of Electronics and Information Technology, Warsaw University of Technology, Warsaw, Poland "Utilization of the Software-Defined Networking Approach in a Model of a 3DTV Service".
- [14] Jose Saldana, David de Hoz, Julián Fernández-Navajas, José Ruiz-Mas "Small Packet Flows in Software Defined Networks: Traffic Profile Optimization".
- [15] Nick McKeown, Tom Anderson, Hari Balakrishnan, Guru Parulkar, Larry Peterson, Jennifer Rexford, Scott Shenker, Jonathan Turner "OpenFlow: Enabling Innovation in Campus Networks".
- [16] Curtis Yu<sup>1</sup>, Cristian Lumezanu<sup>2</sup>, Yueping Zhang<sup>2</sup>, Vishal Singh<sup>2</sup>, Guofei Jiang<sup>2</sup>, and Harsha V.

- Madhyastha1 “FlowSense: Monitoring Network Utilization with Zero Measurement Cost”.
- [17] Srinivas Narayana, Jennifer Rexford, David Walker “Compiling path queries in software-defined networks”.
- [18] Syed Taha Ali, Member, IEEE, Vijay Sivaraman, Member, IEEE, Adam Radford, Member, IEEE, and Sanjay Jha, Senior Member, IEEE
- [19] “A Survey of Securing Networks using Software Defined Networking”. Minlan Yu, Lavanya Jose, Rui Miao “Software Defined Traffic Measurement with OpenSketch”.
- [20] Hesham Mekky University of Minnesota, Minneapolis, MN, USA Fang Hao Bell Labs Alcatel-Lucent, Holmdel, NJ, USA Sarit Mukherjee Bell Labs Alcatel-Lucent, Holmdel, NJ, USA Zhi-Li Zhang University of Minnesota, Minneapolis, MN, USA T.V. Lakshman Bell Labs Alcatel-Lucent, Holmdel, NJ, USA “Application-aware data plane processing in SDN”.