

Automated Toll Collection System Using RFID

Srinivasachar G¹, Amith G²

¹Professor, Dept of Computer Science and Engineering

²Dept of Computer Science and Engineering

^{1,2} Atria Institute of Technology, Bengaluru, Karnataka, India

Abstract- ATCS is an Automated Toll Collection System used for collecting tax automatically. In this we do the identification with the help of radio frequency. A vehicle will hold an RFID tag. This tag is nothing but unique identification number assigned. This will be assigned by RTO or traffic governing authority. In accordance with this number we will store, all basic information as well as the amount he has paid in advance for the TOLL collection. Reader will be strategically placed at toll collection centre. Whenever the vehicle passes the toll naka, the tax amount will be deducted from his prepaid balance. New balance will be updated. In existing method they have used RFID tag and GSM module. In proposed method we have included a gate sensor to stop the vehicle when there is no money in their toll account. In case if one has insufficient balance, his updated balance will be negative one. To tackle this problem, we are alarming a sound, which will alert the authority that this vehicle doesn't have sufficient balance and that particular vehicle can be trapped. As vehicles don't have to stop in a queue, it assures time saving, fuel conservation and also contributing in saving of money.

Keywords- ATCS, RFID Reader, RFID Tag, GSM, Gate Sensor, Toll Collection, prepaid account.

I. INTRODUCTION

Considering the present toll collection system where each vehicle has to stop and pay taxes.

Suppose the manual toll collection system is very efficient then for one vehicle to stop and pay taxes total time taken is 60 seconds. And suppose 100 vehicles cross the toll plaza. Then, time taken by 1 vehicle with 60 second average stop in a month is: $60 \times 30 = 1800$ seconds

Yearly total time taken = $1800 \times 12 = 216200$ seconds = 6.0 hours On average each vehicle that passes through the toll plaza has to wait 6.0 hours in engine start condition yearly. The figure is staggering if on an average we take 100 vehicles pass through the toll plaza each day, then yearly 36000 vehicles pass through the toll plaza. And each year 36000 vehicles just stand still for hours in engine start condition thereby aiding pollution and wasting fuel and money. This

study is if the system is very efficient but what if the vehicle has to wait for 5 minutes?

This is a figure considering one toll plaza. If considering 50 toll systems the above figure will drastically increase.

II. DESIGN COMPONENTS

A. General Terms

RFID is an automated data-capture technology that can be used to electronically identify, track, and store information contained on a tag. A radio frequency reader scans the tag for data and sends the information to a database, which stores the data contained on the tag.

The main technology components of an RFID system are the tag, reader, and database.

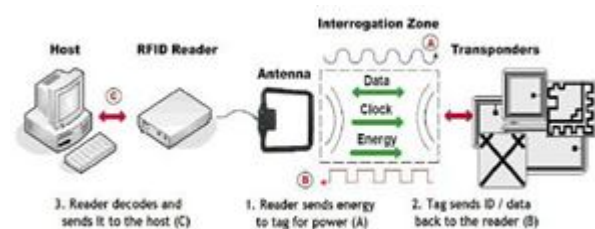


Fig 1. Components of RFID System

B. RFID Tag:

An RFID tag, or transponder, consists of a chip and an antenna. A chip can store a unique serial number or other information based on the tag's type of memory, which can be read-only, read-write, or write-once read-many(WORM). The antenna, which is attached to the microchip, transmits information from the chip to the reader. Typically, a larger antenna indicates a longer read range. The tag is attached to or embedded in an object to be identified, and can be scanned by mobile or stationary readers using radio waves.

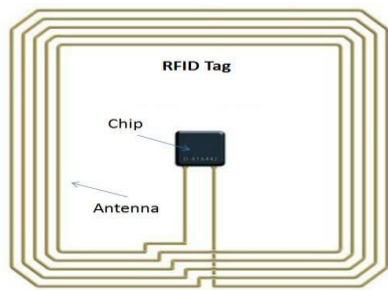


Fig 2. Internal Structure of RFID Tag

C. RFID Reader:

In order for an RFID system to function, it needs a reader, or scanning device, that is capable of reliably reading the tags and communicating the results to a database. A reader uses its own antenna to communicate with the tag. When a reader broadcasts radio waves, all tags designated to respond to that frequency and within range will respond. A reader also has the capability to communicate with the tag without a direct line of sight, depending on the radio frequency and the type of tag (active, passive, or semi passive) used. Readers can process multiple items at once, allowing for increased read processing times. They can be mobile, such as handheld devices that scan objects like pallets and cases, or stationary, such as point-of-sale devices used in supermarkets.

D. GSM Modem:

GSM (Global System for Mobile Communications, originally Group Special Mobile), is a standard developed by the European Telecommunications Standards Institute (ETSI) to describe protocols for second generation (2G) digital cellular networks used by mobile phones. GSM supports voice calls and data transfer speeds of up to 9.6 kbps, together with the transmission of SMS (Short Message Service). GSM uses a variation of time division multiple access (TDMA) and is the most widely used of the three digital wireless telephony technologies (TDMA, GSM, and CDMA). GSM digitizes and compresses data, then sends it down a channel with two other streams of user data, each in its own time slot. It operates at either the 900 MHz or 1800 MHz frequency band. Since many GSM network operators have roaming agreements with foreign operators, users can often continue to use their mobile phones when they travel to other countries. SIM cards (Subscriber Identity Module) holding home network access configurations may be switched to those will meter local access, significantly reducing roaming costs while experiencing no reductions in service.



Fig 3. GSM Modem

III. SYSTEM OVERVIEW

A. Solution provided

ATCS is a toll tax collection implementation system that will save time, space and money. Taking the case study of manual toll tax collection system, we came to the conclusion that if the system is made completely automatic, the time require for collection of tax will be reduced, there will not be need for any vehicle to stop, thereby enlarging the space and the system can be efficiently implemented on a large scale with low capital. AUTOMATED TOLL COLLECTION SYSTEM (ATCS) is an automatic collection system based on RFID i.e. RADIO FREQUENCY IDENTIFICATION where every vehicle will have a tag (RFID) with a unique tag identification number. This identification number will be associated with the complete information such as vehicle number, owner, etc. and also most importantly with a cost value. This value will be deducted automatically every time the vehicle passes the collection unit. No one will have to wait for any time. This cost value can be recharged at the recharge centre.

This system can be effectively implemented on a highway or freeway, where vehicle with a RFID tag will be allowed to pass by deducting an amount from the tag balance. For the vehicles that do not have the tag, their identification will be sent along with the description of the vehicle to the control centre identifying an illegal entry, thereby action can be taken. Then it can be done that, the particular vehicle not having the tag will be billed at their residence or via mail.

The above mentioned losses can put huge burden on Government and the citizens. Reducing these losses is the ample reason for which the need for ATCS is there.

The loss of time puts in a lot of frustration in everyone having to wait for their turn to pay the tax. Most of us want a speedy transport without any obstruction.

When it is a known fact that oil is depleting day by day, just standing, waiting and wasting oil does not make any sense. Loss of fuel is most at reduced speed. So there is a need for continuous motion.

When a number of vehicles have to wait nobody bothers to switch off the engines while waiting and so fuel emission is most at this level. This is a major contributor to the already increasing pollution.

So there is need for ATCS which will cut down on every loss and make it possible to achieve a speedy and non-obstructed transport.

B. Scope

Whenever the matter of Integration of systems comes to mind, we think of a system having the following important features viz.

- 1) *Accuracy*: All the functionally bonded logical dependencies must be integrated.
- 2) *Efficiency*: The whole system should work under all circumstances and on a long run it should work efficiently irrespective of their proprietary format.
- 3) *Cost Effectiveness*: As our software do not require any special software for implementation hence is less costly as compared to other existing system.
- 4) *Any Prerequisite for the use*: As the existing systems are not altered, and integration is done at the background hence there is no need for any training.

C. Feasibility Study

Suppose, If there are 100 manual toll-taxes system and everyday 100 vehicles cross through each system, then,

No of vehicle that pass through one system yearly= $100 \times 30 \times 12 = 36,000$.

No of vehicle that pass through 100 system yearly= $100 \times 36,000 = 36,00,000$.

Table I. Vehicles Passed away from Toll Booth in 1 year

Vehicle	Days	Toll Booth
100	1	1
36000	30 x 12	1
3600000	30 x 12	100

This figure indicates that in one year each of the 36, 00,000 vehicles just stand still for about 6.0 hours in engine start condition creating pollution and burning fuel. Suppose that in 6.0 hours a vehicle uses 1 litre fuel. So, total fuel used by all the vehicles: $36,00,000 \times 1 = 36,00,000$ litre.

Table II. Fuel Consumption and Amount

Vehicle	Fuel Consumed	Amount
1	1 lit.	75/- RS
3600000	3600000 lit.	270,000,000/-RS

Assuming cost of 1 litre fuel = Rs.75

Total cost of fuel consumed by 36, 00000 vehicles = $75 \times 36,00,000 = \text{Rs. } 270,000,000/-$

The above is the money wastage under the consideration that the vehicle stops for 60 second at the toll system, and 100 vehicles pass through the toll plaza each day and there are 100 toll plazas. These figures are all in minimum.

One additional stop every 10 km increases the fuel consumption by approximately 35%. If we consider 10 stops and accelerations per 10 km, then increase in fuel consumption is 130%.

Table III. Speed Vs Fuel Consumption.

Speed	10	20	30	40	50	60	70	80
Fuel	21.00	13.00	10.00	8.00	7.00	5.90	6.30	6.95

Speed	90	100	110	120	130	140	150
Fuel	7.57	8.27	9.03	9.87	10.79	11.77	12.83

D. Technology Used in ACTS

RFID (Radio Frequency Identification) is an automatic identification method, relying on storing and remotely retrieving data using devices called RFID tags or transponders. An RFID tag is a small object that can be attached to or incorporated into a product, animal, or person. RFID tags contain silicon chips and antennas to enable them to receive and respond to radio- frequency queries from an

RFID transceiver. Passive tags require no internal power source, whereas active tags require a power source.

The purpose of an RFID system is to enable data to be transmitted by a mobile device, called a tag, which is read by an RFID reader and processed according to the needs of a particular application. The data transmitted by the tag may provide identification or location information, or specifics about the product tagged, such as price, colour, date of purchase, etc.

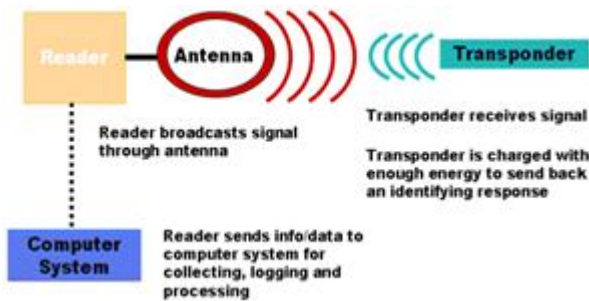


Fig 4. Working of RFID

In a typical RFID system, individual objects are equipped with a small, inexpensive tag. The tag contains a transponder with a digital memory chip that is given a unique electronic product code. The interrogator, an antenna packaged with a transceiver and decoder, emits a signal activating the RFID tag so it can read and write data to it. When an RFID tag passes through the electromagnetic zone, it detects the reader's activation signal. The reader decodes the data encoded in the tag's integrated circuit (silicon chip) and the data is passed to the host computer. **FEATURES**

ATCS is an automatic collection system used for collecting tax automatically. In this we do the identification with the help of radio frequency. Flexibility is the main feature and with the slightest change this can be converted to a completely new implementation. With the help of the latest technology (RFID), the implementation of this project is very simplified. RFID technology together with a very secure database yields into a highly efficient and secure system.

Following are the features and advancement of ATCS over presently existing system:

- 1) RFID tag cannot be cloned, so cannot be cheated.
- 2) Very efficient saving of time.
- 3) Wastage of money reduced.
- 4) Consumption of oil is reduced.
- 5) Pollution is reduced to a large extent.
- 6) Speedy transport.
- 7) Less congestion on the roadways.

- 8) Comparatively less maintenance cost

V. CONCLUSION

RFID is not replacement of Bar code but it is a technology offering various features. RFID offers highly reliable data collection in harsh environments. RFID technology can provide new capabilities as well as an efficient method to collect, manage, disseminate, store, and analyse information. It not only eliminates manual data entry but also inspires new automation solutions. It fundamentally changes how processes are managed and how businesses operate. RFID's attributes provide greater automated tracking capability than existing technologies, and thus create the opportunity to reduce labor, improve inventory management and generate better market intelligence, leading to lower operational costs and increased revenue generation.

VI. ACKNOWLEDGMENTS

We take this opportunity to thank our Head of the Department Dr. Aishwarya P, guides Prof. Srinivasachar G and Mrs. Pallavi for their valuable guidance and for providing all the necessary facilities, which were indispensable in the completion of this paper. We are also thankful to all the Staff members of the Department of Computer Science and Engineering of Atria Institute of Technology for their valuable time, support, comments, suggestions and persuasion.

REFERENCES

- [1] The Times of India paper April 20, 2012 "Now Road toll can be paid without stopping at Toll Plazas".
- [2] The Times of India paper May 28, 2012 "High-Tech number plates for 20 lakh vehicles soon".
- [3] Tom Petruzzelis, "TELEPHONE PROJECTS FOR THE EVIL GENIUS", BPB PUBLICATIONS.
- [4] Klaus Finkenzeller, "RFID Handbook: Radio-Frequency Identification Fundamentals and Applications". John Wiley & Sons, 2000.
- [5] H. Vogt. Efficient Object identification with passive RFID tags. In F.Mattern and M. Naghsinesh, editors, International Conference on Pervasive Computing. Volume 2414 of Lecture Notes in Computer Science, pages 98-113, Zurich, August 2002. Springer-Verleg.
- [6] Manikandan.S, Abishek.S, Aravindhan.S, Karthikeyan.R, Mukunthan.D, "AUTOMATIC TOLL TAX COLLECTION SYSTEM BY USING RFID", International Journal of Pure and Applied Mathematics.
- [7] Prakshaal Jain, Prashant Dhillon, Anand Vardhan Singh, Kaustubh Vats, Shrivishal Tripathi, "A Unique Identity based Automated Toll Collection System using RFID and

Image Processing”, International Conference on Computing, Power and Communication Technologies (GUCON), 2018.

- [8] R.Kavitha, S.R.Srividhya, “*Authenticated Toll Collection and Tracking of Vehicles using RFID*”, International Journal of Innovative Technology and Exploring Engineering (IJITEE), June 2019.