

An Investigation of Characteristics Strength of BFRC Concrete Produced Using With GGBS And Fly Ash

Akhil Khandelwal¹, Dr. Savita Maru²

² Professor

^{1,2} Ujjain Engineering College Ujjain, India

Abstract- Basalt fiber reinforced concrete, a new high performance cement-based composite material, is a focus of attention and has developed rapidly in recent years. In this paper, the impact behavior of BFRC with six kinds of volume content (0%, 0.05%, 0.1%, 0.15%, 0.2%, 0.25%) subjected to various high strain rates was investigated using a 74 mm-diameter split Hopkinson pressure bar (SHPB) apparatus. And the effects of volume fractions and strain rate on dynamic compressive strength and toughness were studied according to the stress-strain curves obtained by the experiment. From the microscopic point of view, by analyzing the scanning electron microscope (SEM) photographs, this paper made a research on the micro-properties and pore structure of BFRC. The fiber distribution situation and the interface between fibers and cement were observed. By studying the micro-properties and pore structure of BFRC, the interface properties and the strengthening mechanism of BFRC were analyzed. In this thesis has attempted to examine mechanical properties of M30 grade of concrete of made with basalt fibers. To reduce the deleterious effects of the production of cement on the environment, concrete is being developed by substituting admixtures like GGBS (Ground Granulated Blast-furnace Slag) and Fly Ash in place of cement. Multi blended concrete developed with Fly ash and GGBS showed depletion in the mechanical properties. Basalt fibers were added to this mix additionally to overcome this deficiency. Basalt Fibers used in this experiment. In this experiment 0.25% of total dosage of fiber content was fixed with Supplementary materials Fly ash GGBS in varying percentages i.e. 0% of fly ash and 100% of GGBS, 20% of fly ash and 80% of GGBS, 40% of fly ash and 60% of GGBS, 20% of fly ash and 80% of GGBS, 100% of fly ash and 0% of GGBS of total dosage (i.e. 40%) by weight of cement. Results are taken as a Beams and Cubes are casted to check the flexural strength and compressive of concrete at 7 days and 28 days.

Keywords- M 30 Grade of cement concrete, Multi blended concrete, Fly ash, GGBS, Basalt fibers, flexural strength, compressive strength, beam and cube.

I. INTRODUCTION

Concrete has the advantage of high compressive strength, superior corrosion resistance, and relatively lower cost, therefore, it is still the most widely used building material in the world. However, as one type of artificial brittle materials, concrete is relatively insufficient in terms of tensile strength, bending resistance, impact resistance, and toughness. As the service time increases, the defects of concrete become increasingly prominent, which leads to many problems in engineering applications.

At present, it is internationally recognized that fibers are able to be added to concrete to overcome the defects of concrete. In the past two decades, blending fibers into concrete has been widely applied in some projects [1,2,3,4,5,6], such as railway sleepers, dams, and airport sidewalks. Commonly the composite material theory and the fiber spacing theory are adopted to explain the reinforcement mechanism of fiber reinforced concrete. The former is built on the mixing rule of composite materials and the latter is the perfect bond theory between fiber and matrix. They explain the reinforcement effect of fiber on concrete from different perspectives.

The second phase, known as final set, may vary between 5 to 6 hours after the mixing operation. During this phase, concrete appears to be relatively soft solid without Surface hardness.

Depending on the quality and proportions of the ingredients used in the mix, to properties of concrete vary almost as widely as different kinds of stones. Concrete has enough strength in compression, but has little strength in tension. Due to this concrete as such is weak in bending, shear and torsion. However to use cement concrete for common structures such as beams, slabs, retaining structure etc, steel bars may be placed at tensile zones of the structure which may then be concrete. The steel bars, known as steel reinforcement, embedded in the concrete, takes the tensile stresses. The concrete so obtained is termed as reinforced cement concrete, commonly abbreviated as R.C.C.

The workable solution to this problem is substituting cement with GGBS and Fly Ash. The fibers are used for concrete to overcome definite insufficiency. The most common fibers are basalt, glass, polypropylene, carbon fibers and steel. The workability of binary mix containing higher percentage substitution with GGBS and fly ash was higher and lower respectively. Improvement of properties can be observed for mixes designed appropriately. Long term compressive strength of both Fly ash and GGBS mixes can be improved. Addition of 0.25% of basalt fibers (by volume of concrete) showed increment in flexural strength. The fly ash and GGBS with 40% as replacement of cement and 3 kg/m³ basalt fibers dosages in concrete developed the better compactness of concrete microstructure, showed Compressive and Flexural tensile strength approximately 10% and 25% higher. In this experiment 0.25% of total dosage of fiber content was fixed with Supplementary materials Fly ash GGBS in varying percentages i.e. 0% of fly ash and 100% of GGBS, 20% of fly ash and 80% of GGBS, 40% of fly ash and 60% of GGBS, 20% of fly ash and 80% of GGBS, 100% of fly ash and 0% of GGBS of total dosage (i.e.40%) by weight of cement. Results are taken as a Beams and Cubes are casted to check the flexural strength and compressive of concrete at 7 days and 28 days. Fibers not only help in withstanding tensile stresses but also enhance strength and durability.

II. MATERIALS USED

A. Fiber reinforced concrete (FRC)

Conventional concrete is modified by random dispersal of short discrete fine fibers of asbestos, steel, sisal, glass, carbon, poly-propylene, nylon, etc. Asbestos cement fibers so far have proved to be commercially successful. Fibers include synthetic fibers and natural fibers each of which lend varying properties to the concrete. The improvement in structural performance depends on the strength characteristics, volume, and spacing. Dispersion and orientation, shape and their aspect ratio (ratio of length to diameter) of fibers. A fiber-reinforced concrete requires a considerably greater amount of fine aggregate than that for conventional concrete for convenient handling. For FRC to be fully effective, each fiber needs to be fully embedded in the matrix, thus the cement paste requirement is more. For FRC the cement paste required ranges between 35 to 45 per cent as against 25 to 35 per cent in conventional concrete the behavior of fiber reinforced concrete (FRC) is shown in Fig. 1.

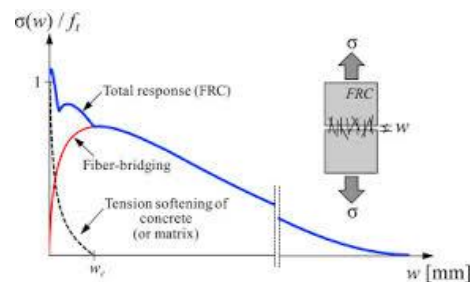


Fig. 1. Concrete the behavior of fiber reinforced concrete (FRC)

B. Fly ash

The fly ash or pulverized fuel ash (PFA) is the residue from the combustion of pulverized coal collected by the mechanical dust collectors or electrostatic precipitators or separators from the fuel gases of thermal power plants. Its composition varies with load on the boiler, the type of fuel burnt and type of separators, etc. like Portland cement, fly ash contains oxide of calcium, aluminum and silicon, but the amount of calcium oxide is considerably less. The carbon content in fly ash should be as low as possible, where as the silica content should be as high as possible.

GGBS (Ground Granulated Blast Furnace Slag)

GGBS comprises mainly of calcium oxide, silicon dioxide, aluminum oxide, magnesium oxide. It has the same chief chemical elements as ordinary Portland cement but in different proportions and the addition of GGBS in geopolymer concrete (GPC) increases the strength of the concrete and also curing of Geo-Polymer concrete at room temperature is possible.

III. OBJECTIVE OF VIEW

The most important aim of the present work of thesis is to examine mechanical properties of M30 grade of concrete of made with basalt fibers. To reduce the deleterious effects of the production of cement on the environment, concrete is being developed by substituting admixtures like GGBS (Ground Granulated Blast-furnace Slag) and Fly Ash in place of cement. Multi blended concrete developed with Fly ash and GGBS showed depletion in the mechanical properties.

The following are the objectives of this thesis.

1. To find out the effect of Ground-granulated blast-furnace slag (GGBS or GGBFS) on strength when mixed with concrete sample. To study the workability of concrete on variation in different percentage of fly ash when mixed with concrete.

2. Increase the economy of the construction with using the cheaper material as a replacement of the cement.
3. To find out the change in slump value.
4. To check the flexural strength and compressive of concrete at 7days and 28 days.
5. To increase the service life.

Problem Statement

1. The most important problems faced in reinforced concrete construction are the decay of reinforcing steel, which considerably affects the durability and life of concrete structures.
2. Normal concrete gives a very low tensile strength, restricted ductility and small amount of resistance to cracking. Internal small cracks lead to brittle failure of concrete. In this new generation civil engineering constructions have their own structural and durability requirements.
3. In this experiment 0.25% of total dosage of fiber content was fixed with Supplementary materials Fly ash GGBS in varying percentages i.e. 0% of fly ash and 100% of GGBS, 20% of fly ash and 80% of GGBS, 40% of fly ash and 60% of GGBS,20% of fly ash and 80% of GGBS, 100% of fly ash and 0% of GGBS of total dosage (i.e.40%) by weight of cement. Results are taken as a Beams and Cubes are casted to check the flexural strength and compressive of concrete at 7 days and 28 days.

IV. METHODOLOGY AND EXPERIMENTAL VIEW

In this thesis has attempted to examinemechanical properties of M30 grade of concrete as designed by using IS: 10262 (2000) with water binder ratio of 0.45.Toreducethedeleterious effects of the production of cement on the environment, concreteis being developed by substituting admixtures like GGBS (Ground Granulated Blast-furnace Slag) and FlyAsh in place of cement. Multi blended concretedevelopedwithFlyashandGGBSshoweddepletioninthe mechanicalproperties. In this experiment 0.25% of total dosage of fiber content was fixed with Supplementary materials Fly ash GGBS in varying percentages i.e. 0% of fly ash and 100% of GGBS, 20% of fly ash and 80% of GGBS, 40% of fly ash and 60% of GGBS, 20% of fly ash and 80% of GGBS, 100% of fly ash and 0% of GGBS of total dosage (i.e.40%) by weight of cement. Results are taken as a Beams and Cubes are casted to check the flexural strength and compressive of concrete at 7 days and 28 days.

Table 1 Mix proportion by(Saturated surface dry) mass

	Cement	Water	Fine aggregate	Coarse aggregate
Quantity (in gm)	414	186	711.21	1079.07
Ratio	1	0.45	1.72	2.61

Table 2 the final trial batches quantities of fly ash, GGBS and Basalt fiber per cubic meter of concrete M30 are

Mix designation	Cement kg/m ³	Fly Ash kg/m ³	GGBS kg/m ³	Basalt Fiber	Fine Aggregate kg/m ³	Coarse Aggregate kg/m ³	Water kg/m	W / C ratio
C100	414	-	-	-	725.43	1089.86	161	0.45
C60+(F0 0+G100)	248.4	0	165.6	3	725.43	1089.86	161	0.45
C60+(F2 0+G80)	248.4	33.12	132.48	3	725.43	1089.86	161	0.45
C60+(F4 0+G60)	248.4	66.24	99.36	3	725.43	1089.86	161	0.45
C60+(F6 0+G40)	248.4	99.36	66.24	3	725.43	1089.86	161	0.45
C60+(F8 0+G20)	248.4	132.48	33.12	3	725.43	1089.86	161	0.45
C60+(F1 00+G00)	248.4	165.6	0	3	725.43	1089.86	161	0.45

Table 3 : Test matrix for Cube

Mix Design Codes	Cement (in %)	Fly Ash (Total dosage (i.e.40 %) by weight of cement)	GGBS (Total dosage (i.e.40 %) by weight of cement)	Fiber Quantity (kg/m ³)	Number of Cubes for 7 day compression test	Number of Cubes for 28 day compression test
MI X-M30	100%	0%	0%	0	1	1


C1-MIX	60%	100%	0%	3	1	1
C2-MIX	60%	80%	20%	3	1	1
C3-MIX	60%	60%	40%	3	1	1
C4-MIX	60%	40%	60%	3	1	1
C5-MIX	60%	20%	80%	3	1	1
C6-MIX	60%	0%	100%	3	1	1

B6-MIX	60%	0%	100%	3	1	1
--------	-----	----	------	---	---	---

V. RESULT AND OBSERVATIONS

A. Workability Test


Note : (10 mm Basalt fiber dosage 3 kg/m³)

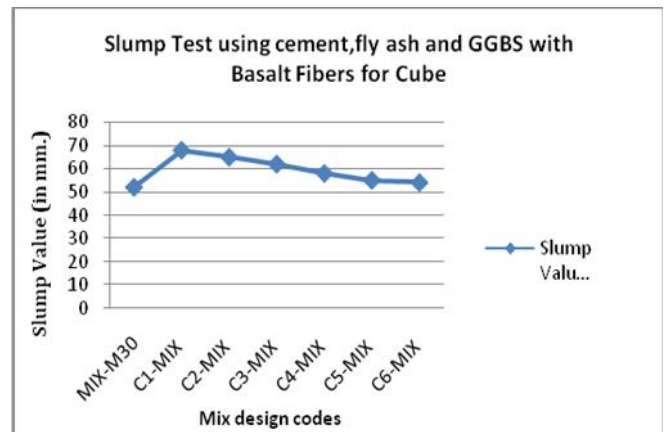

Graph 1: Workability of various concrete mixes design for slump cone test in cube specimen


Table 4 : Test matrix for Beam

Mix Design Codes	Cement (in %)	Fly Ash (Total dosage (i.e.40 %) by weight of cement)	GGBS (Total dosage (i.e.40 %) by weight of cement)	Fiber Quantity (kg/m ³)	Number of Beam for 7 day Flexural strength	Number of Beam for 28 day Flexural strength
MIX-M30	100%	0%	0%	0	1	1
B1-MIX	60%	100%	0%	3	1	1
B2-MIX	60%	80%	20%	3	1	1
B3-MIX	60%	60%	40%	3	1	1
B4-MIX	60%	40%	60%	3	1	1
B5-MIX	60%	20%	80%	3	1	1

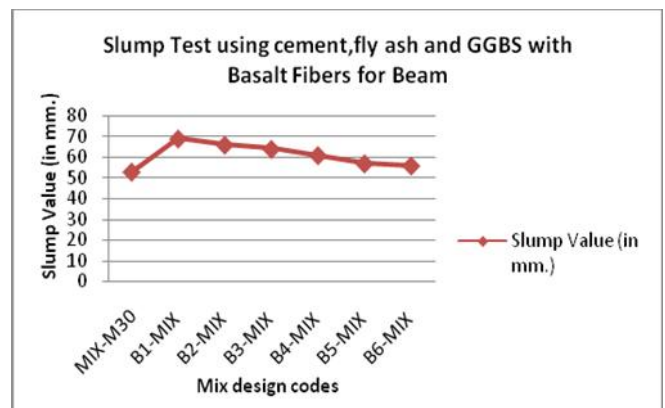


Graph 2 : Workability of various concrete mixes design for slump cone test in beam specimen


B. Compaction Factor Test

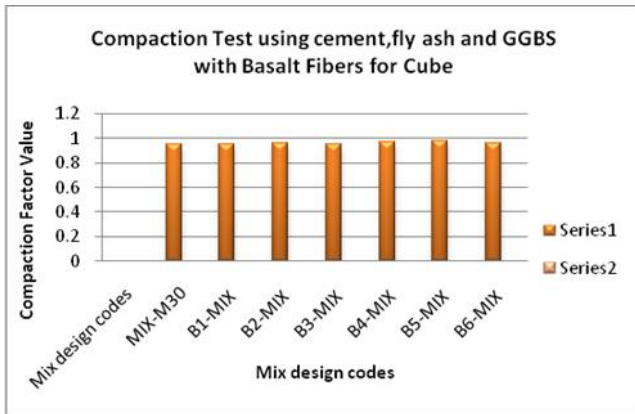

Graph 3: Compaction value of various concrete mixes design for Compaction factor test (Cube specimen)

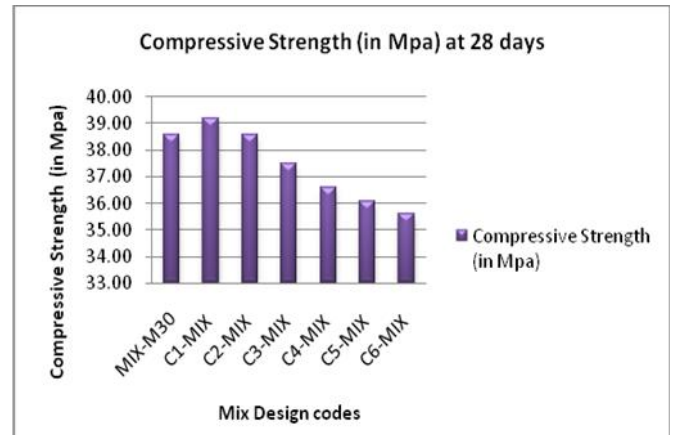


Graph 6: Compressive strength for M30 of Fly Ash & GGBS based multi blended concrete mixes with Basalt fibers at 28 days.

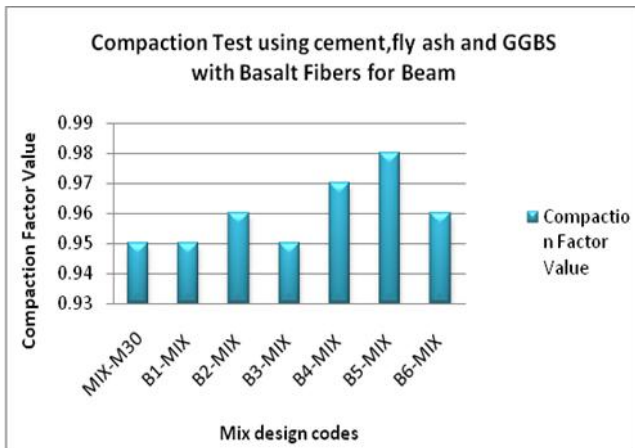

Graph 4: Compaction value of various concrete mixes design for Compaction factor test (Beam specimen)

7.4 Compressive Strength

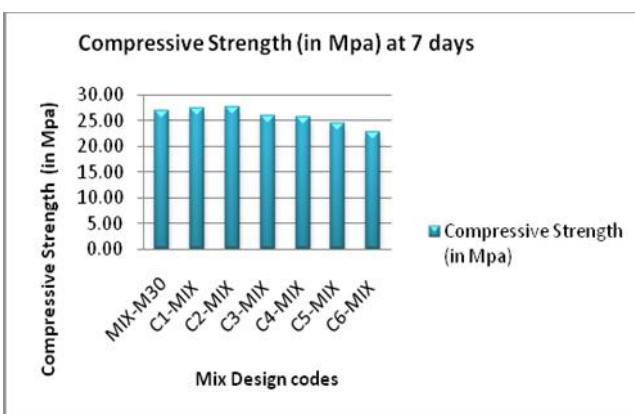

Graph 5 : Compressive strength for M30 of Fly Ash & GGBS based multi blended concrete mixes with Basalt fibers at 7 days.

To keep the water-cement ratio constant at 0.45 for all the mixes.

Compressive Strength; Fly Ash & GGBS based multi blended concrete mixes with Basalt fibers are compressive strength at 7 & 28 day the results shows in figure 7.5 & 7.6. Compressive strength of Fly ash & GGBS based multi blended concrete mixes with Basalt fibers were reduced with the increase in percentage of fly ash and GGBS at 7day. Conventional concrete compressive strength was 26.95 N/mm² at 7 days, whereas compressive strength was ranged from 22.19 N/mm² – 27.60 N/mm² for multi blended concrete mixes of Fly ash & GGBS with basalt fiber. Multi blended concrete with basalt fiber at 40% of GGBS and fly ash (i.e.40% by weight of cement) show the least reduction in compressive strength compared to conventional concrete. Compressive strength of Fly ash & GGBS based multi blended concrete mixes with Basalt fibers were reduced with the increase in percentage of fly ash and GGBS at 28 days. Conventional concrete compressive strength was 38.60 N/mm² at 28 days, whereas compressive strength was ranged from 35.60 N/mm² -39.60 N/mm² for multi blended concrete mixes of Fly ash & GGBS with basalt fiber. The multi blended concrete with micro silica & basalt fiber exhibited the target strength of 30 grades at 40% of GGBS and fly ash (i.e.40% by weight of cement).

VI. CONCLUSIONS

1. This research aimed to study an experimental study on strength of basalt fiber reinforced concrete produced by partially replacing cement with GGBS and fly ash
2. The flexural & compressive strength of Fly Ash & GGBS based multi blended concrete with basalt fibers were

improved when compared with conventional concrete mix design M30.

3. The Basalt Fiber reinforced multi blended concrete almost the same flexural strength as that of conventional concrete at 40% of GGBS and fly ash (i.e.40% by weight of cement).
 4. Compressive strength of Fly ash & GGBS based multi blended concrete with basalt fibers increase in percentage of Fly ash & GGBS at 7 days. It followed the similar trend at 28 days except at 40% of GGBS and fly ash (i.e.40% by weight of cement) increase in percentage with basalt fibers.
 5. Impact of addition of cementations materials on mechanical properties is significant. Concrete with required grade can be achieved with the judicious use of these materials in suitable proportions. The 30 grade concrete can be developed with the use 0.25% of total dosage of fiber content was fixed with Supplementary materials Fly ash GGBS in varying percentages i.e. 0% of fly ash and 100% of GGBS, 20% of fly ash and 80% of GGBS, 40% of fly ash and 60% of GGBS, 20% of fly ash and 80% of GGBS, 100% of fly ash and 0% of GGBS of total dosage (i.e.40%) by weight of cement.
- REFERENCES**
- [1] Anant Kumar, Nupoor Dewangan , Anurag Wahane International “Compressive Strength Characteristics Of Concrete Partially Replaced By Fly Ash & Ggbs” Journal of Creative Research Thoughts© 2021 IJCRT | Volume 9, Issue 6 June 2021 | ISSN: 2320-2882
 - [2] Zhuo Tanga,Wengui Lia Vivian,W.Y.Tamb and Zhiyu Luo “Investigation on dynamic mechanical properties of fly ash/slag-based geopolymeric recycled aggregate concrete”<https://doi.org/10.1016/j.compositesb.2020.107776>.
 - [3] Akshay kumar Moogi, Swapnil Cholekar “An Experimental Investigation On Strength And Durability Characteristics Of Basalt Fiber Reinforced Concrete Produced By Partially Replacing Cement With Fly Ash And Ggbs” (IRJET) e-ISSN: 2395-0056 Volume: 05 Issue: 08 | Aug 2018 www.irjet.net p-ISSN: 2395-0072
 - [4] Anil Ronad , V.B.Karikatti, S.S.Dyavanal “A Study On Mechanical Properties Of Geopolymer Concrete Reinforced With Basalt Fiber” IJRET eISSN: 2319-1163 | pISSN: 2321-7308
 - [5] Chaohua Jiang, Ke Fan, Fei Wu, Da Chen, “Experimental study on the mechanical properties and microstructure of chopped basalt fibre reinforced concrete.” Materials and Design, Elsevier, Volume 58, 2014, pp. 187–193
 - [6] A.H.L.Swaroop, K.Venkateswararao, Prof P Kodandaramarao “Durability Studies On Concrete With Fly Ash & Ggbs” International Journal of Engineering Research and Applications (IJERA) ISSN: 2248-9622 Vol. 3, Issue 4, Jul-Aug 2013, pp.285-289 285 | Page
 - [7] Jia, Aruhan and Yan “ Natural and accelerated carbonation of concrete containing fly ash and GGBS after different initial curing period” Magazine of Concrete Research <http://dx.doi.org/10.1680/macr.10.00134> Paper 1000134 Received 27/07/2010; revised 09/11/2010; accepted 08/02/2011 Thomas Telford Ltd & 2012.
 - [8] Poornima M Reddy Dr. Shreenivas Reddy Shahapue Maneeth P D Brijbhushan “Analysis of Action of Polypropylene Fiber on M-30 Concrete by Supplementing Cement with FlyAsh and GGBS” IJIRST –International Journal for Innovative Research in Science & Technology| Volume 4 | Issue 3 | August 2017 ISSN (online): 2349-6010
 - [9] S. Paulraj, Dr. N. Balasundaram, K. Sates Kumar, M. Dharshna Devi “Experimental Studies On Strength And Sec Characteristics Of Basalt Fiber Reinforced Oncrete” (IJCIET) Volume 8, Issue 1, January 2017, pp. 704–711 Article ID: IJCIET_08_01_082 Available online at 0976-6308 and ISSN Online: 0976-6316
 - [10] Aliakbar Gholampour, Togay Ozbakkalogl, “Performance of sustainable concretes containing very high volume Class-F fly ash and ground granulated blast furnace slag.” Journal of Cleaner Production, Volume 162, 2017, pp.1407-1417.
 - [11] Osama Ahmed Mohamed, Omar Fawwaz Najm, “Compressive strength and stability of sustainable self-consolidating concrete containing fly ash, silica fume, and GGBS.” Frontiers of Structural and Civil Engineering, Volume 11(4), 2017, pp. 406-411.
 - [12] J. Guru Jawahar and G. Mounika “Strength Properties Of Fly Ash And Ggbs Based Geo Polymer Concrete” ASIAN JOURNAL OF CIVIL ENGINEERING (BHRC) VOL. 17, NO. 1 (2016) PAGES 127-135
 - [13] Thanongsak Nochaiya, Watcharapong Wongkeo, Arnon Chaipanich, “Utilization of fly ash with silica fume and properties of Portland cement–fly ash–silica fume concrete.” Fuel, Elsevier, Volume 89, 2009, pp.768-774.
 - [14] IS 5816-1999(Reaffirmed-2004), Methods of Test for Flexural and Tensile strength of Concrete, Bureau of Indian Standards, New Delhi
 - [15] IS 456 (Reaffirmed-2005), Indian Standard for Plain and Reinforced Concrete-Code of Practice, Bureau of Indian Standards, New Delhi.