

Improving Performance of Radiator By Using Coolant

Prof.Nagre G.P.¹, Rohit Kadam², Sanket Kardiwal³, Vedant Jadhav⁴, Yash Bahadure⁵

^{1,2,3,4,5} Dept of Mechanical Engineering

^{1,2,3,4,5} MGM's Polytechnic, Sambhajinagar (MH, India)

Abstract- In this paper the experimental analysis of the thermal behaviour of the single phase flows through an automobile radiator. In advance technological development in automotive industries has increased the demand for high efficiency engines. A high efficiency engine is not only based on its performance but also for better fuel economy and less emission. One of the important elements in car cooling system is the radiator. Radiator plays an important role in heat exchange. In this paper the experimental analysis of the thermal behaviour of the single phase flows through an automobile radiator. Heat transfer enhancement studies can help in the design of lighter and more compact radiators for the same given load, which in turn can improve the fuel economy of the automobile. The thermal performance of a radiator operated with Coolant fluids is compared with a radiator using conventional coolant. In this study, effect of adding Al₂O₃ Coolantparticle as a base fluid in radiator will be investigated experimentally. Forced convective heat transfer of water and ethylene glycol based Coolant fluid will be compared experimentally with water, water + ethylene glycol (60:40), water+ethylene glycol+ Coolantparticles have been carried out. The experimental results show that Al₂O₃ based coolant show better heat transfer as compared to other coolants. Coolant fluids have the capacity to transfer heat more efficiently than conventional coolant like water. Due to high thermal conductivity, MWCNT is a better coolant amongst CuO and water.

Keywords- Automobile Radiator, Heat Transfer Enhancement, engine coolant ethylene glycol, coolant fluids, alumina, MgO etc.

I. INTRODUCTION

In advanced engineering technology optimization process is very important. In automobile weight reduction one of them has been a major focus for manufacturers in recent years to improve the fuel economy and minimizing the running cost. The advancement in technology in the automotive industry has increased the need for high performance engines. The engine performance is based on the fuel economy and high average. Reducing the vehicle weight by optimizing design and size of a radiator. By using the Coolant fluid high thermal conductivity coolant increase the performance more 50% compared to conventional coolant. In

an automobile, fuel and air produce power within the engine through combustion. Only a portion of the total generated power is actually supplied to the automobile and the rest is wasted in the form of exhaust and heat. If this excess heat is not removed by the engine, temperature becomes too high which results in overheating and decrease viscosity of lubricating oil, weakening the metal of engine parts. A cooling system is used to remove this excessive heat. Most automotive cooling systems consist of radiator, water pump, electric cooling fan, radiator pressure cap, and thermostat. In which radiator is the most prominent part of the system because heat exchange. As coolant travels through the engine's cylinder block, it accumulates heat. Addition of fins is one of the approaches to increase the cooling rate of the radiator. It provides greater heat transfer area and enhances the air convective heat transfer coefficient as the coolant flows through the tubes of the radiator.

II. LITERATURE SURVEY

The presence of Coolantparticles in the base fluids contributes better flow of mixing and higher thermal conductivity compared to pure fluid. Heat transfer coefficient can be improved up to 50% compared to the original coolant by Nor Azwadi et al. The revealed that the dispersion of - Al₂O₃particles at 4.3 vol% can increase the effective thermal conductivity of water by almost 30%. Since then, many studies have been carried out to investigate the enhancement of thermal conductivity with different Coolantparticle volume fractions, materials and dimensions in several base fluids. Eastman et al. reported that the thermal conductivity of ethylene glycol Coolant fluidscontaining 0.3% volume fraction of copper particles can be enhanced up to 40% compared to that of ethylene glycol base fluid. Most of the findings show that thermal conductivity of Coolant fluids is higher than the base fluids by Adithya Choure. In demonstrated that oxide ceramic Coolant fluids consisting of CuO or Al₂O₃ Coolantparticles in water or ethylene-glycol exhibit enhanced thermal conductivity. For example, using Al₂O₃ Coolantparticles having mean diameter of 13 nm at 4.3% volume fraction increased the thermal conductivity of water under stationary conditions by 30%. On the other hand, larger particles with an average diameter of 40 nm led an increase of less than 10%.In research paper investigated the thermal conductivity enhancement of three different Coolant

fluids CuO, ZnO₂ and Al₂O₃ Coolant fluids. Also, thermal conductivity increases within creasing temperature and volume concentration. In another paper Author predict the thermal conductivity theoretically under dynamic and static processes taking into account the effect of Brownian motion, particle size, Coolant layer and particle surface. They concluded that thermal conductivity is due to both static and dynamic mechanisms. In a different study, reported a nonlinear model of thermal conductivity enhancement of 18% at volume fraction of 0.05 vol% using Fe-ethylene glycol Coolant fluids. Author compared the thermal conductivity between Cu-ethylene glycol Coolant fluid and pure ethylene glycol.

III. CORE CONTENT

Coolant fluid

A coolant is a substance, typically liquid, that is used to reduce or regulate the temperature of a system. An ideal coolant has high thermal capacity, low viscosity, is low-cost, non-toxic, chemically inert and neither causes nor promotes corrosion of the cooling system. Some applications also require the coolant to be an electrical insulator While the term "coolant" is commonly used in automotive and HVAC applications, in industrial processing heat-transfer fluid is one technical term more often used in high temperature as well as low-temperature manufacturing applications. The term also covers cutting fluids. Industrial cutting fluid has broadly been classified as water-soluble coolant and neat cutting fluid. Water-soluble coolant is oil in water emulsion. It has varying oil content from nil oil (synthetic coolant). This coolant can either keep its phase and stay liquid or gaseous, or can undergo a phase transition, with the latent heat adding to the cooling efficiency. The latter, when used to achieve below-ambient temperature, is more commonly known as refrigerant.



Fig.1 coolant fluid

Radiator

Radiators are heat exchangers used to transfer thermal energy from one medium to another for the purpose of cooling and heating. The majority of radiators are constructed to function in automobiles, buildings, and electronics. The radiator is always a source of heat to its environment, although this may be for either the purpose of heating this environment, or for cooling the fluid or coolant supplied to it, as for engine cooling. Despite the name, most radiators transfer the bulk of their heat via convection instead of thermal radiation. Spacecraft radiators necessarily must use radiation only to reject heat.

Fan

The fans do not work alone. They are part of a larger overall cooling system in the vehicle. All of the parts need to be working correctly for the fan to be able to do its job and cool the engine. When the engine is cool or even at normal operating temperature, the fan clutch partially disengages the engine's mechanically driven radiator cooling fan, generally located at the front of the water pump and driven by a belt and pulley connected to the engine's crankshaft.

Temperature Sensors

A temperature sensor is a device, typically, a thermocouple or RTD that provides for temperature measurement through an electrical signal. A thermocouple (T/C) is made from two dissimilar metals that generate electrical voltage in direct proportion to changes in temperature.

Flow Sensor

The potential difference is sensed by electrodes aligned perpendicular to the flow and the applied magnetic field. The physical principle at work is Faraday's law of electromagnetic induction. The magnetic flow meter requires a conducting fluid and a nonconducting pipe liner.



Fig.2 Flow Sensor

Heating Coil

An electric heater is an electrical device that converts electric current to heat. The heating element inside every electric heater is an electrical resistor, and works on the principle of Joule heating: an electric current passing through a resistor will convert that electrical energy into heat energy.

Flow Control Valve

Flow control valve. A flow control valve regulates the flow or pressure of a fluid. Control valves normally respond to signals generated by independent devices such as flow meters or temperature gauges. The altitude valve will remain open while the tank is not full and it will close when the tanks reaches its maximum level.

Arduino UNO

Arduino board designs use a variety of microprocessors and controllers. The boards are equipped with sets of digital and analog input/output pins that may be interfaced to various expansion boards and other circuits. The boards feature serial communications interfaces, including Universal Serial Bus on some models, which are also used for loading programs from personal computers. The microcontrollers are typically programmed using a dialect of features from the programming languages C and C++. In addition to using traditional compiler tool chains, the Arduino project provides an integrated development environment (IDE) based on the Processing language project.



Fig.3 Arduino UNO

Pump

Pump is device that moves fluids, sometimes slurries, by mechanical action. Pumps operate by some mechanism and consume energy to perform mechanical work by moving the fluid. Pump can run with the help of electricity, engines etc.

IV. OBJECTIVE OF PAPER

- 1) The main objective of this project is design and simulation of shell and tube heat exchanger with segmental baffle using CFD and measuring the thermal performance that is heat transfer, temperature variation, velocity etc.
- 2) Also doing the CFD analysis for plane tube with circular fins over the tubes along with baffle.
- 3) Comparing these results for both the case with and without fins and finding which is effective for improving the performance of heat exchanger.

V. SYSTEM DEVELOPMENT

In this experiment devices are arranged like pump, radiator, Coolant fluids, piping, sensors and all placed over the wooden base as shown in figure. In which Coolant fluids is a working fluids which is stored in tank and with the help of pump it has circulate radiator through piping, temperature sensor will placed at inlet and outlet of radiator to check the temperature. Radiators are heat exchangers used to transfer thermal energy from one medium to another. Flow control valve are used to control the flow rate and with the help of flow sensor check the flow rate. Heating coil is used to heat the Coolant fluid liquids so we check the heat transfer rate while passing the fluid from radiators.

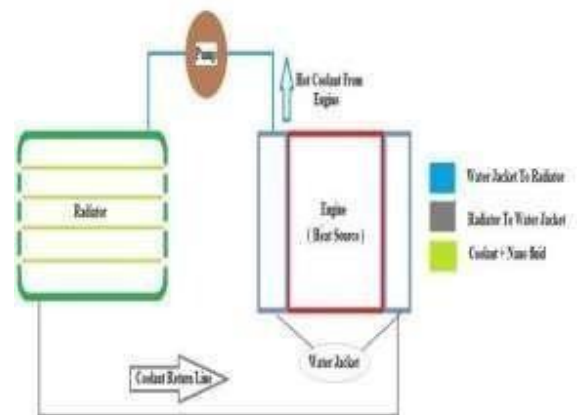


Fig 4.1 Conceptual Design



Fig. 4.2 Actual Design

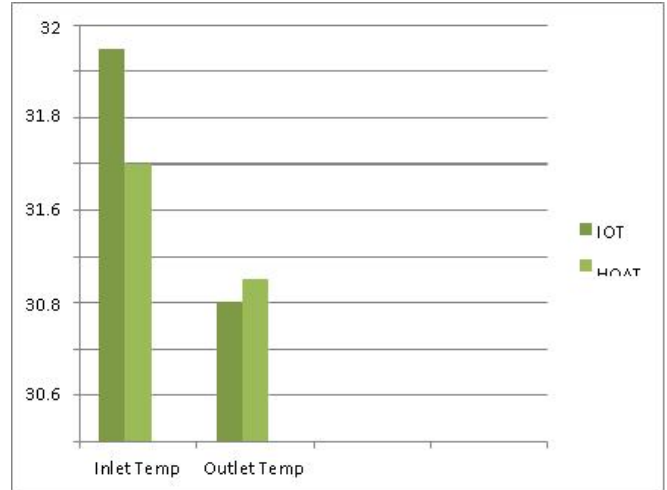


Fig. 6 Inlet Temp vs. Outlet Temp

VII. RESULT AND CONCLUSION

Tests were taken on two different flow rates as flow rates play an important role in heat transfer. Coolants used were water, CuO and MWCNT Coolant fluids concentration 1% by volume. Following are the results in the form of graphs.

1. Flow rate= 71.5 lpm
- a. Temp vs. Total Time

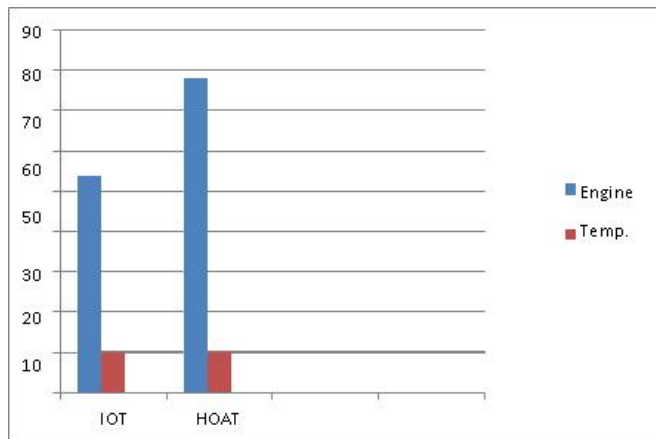


Fig 5. Total Time vs. Temperature

- b. Inlet Temp vs. Outlet Temp.

Initial temperature was about 80 degree centigrade. Then after the circulation started, temperature started to drop. According to the result, water took around more than 8 min to cool down to ambient temperature where CuO and MWCNT Coolant fluids took 5 min and 4.5 min to cool down. Considering the temperature difference in all the three fluids, MWCNT is a better coolant.

As the flow rate was decreased the temperature difference was increased. Water cooled down from 80 degree centigrade to 34 in 8.40 min. CuO and MWCNT cooled down with greater temperature differences. Combining all the data together, considering the heat transfer capacity of all the three fluids, MWCNT has the highest efficiency amongst all. In this project Coolant fluids are used as a coolant in radiator because it has a high thermal conductivity due to its surface area as compared to other coolants such as water and ethylene glycol.

Following conclusions can be made from this project.

1. Coolant fluids have the capacity to transfer heat more efficiently than conventional coolant like water.
2. With the decrease in flow rate, the coolant gets more time to absorb heat and hence it boosts heat transfer.
3. Due to high transfer rate of Coolant fluid, size of the radiator can be reduce to some extent which will lead to be better fuel economy in vehicle.
4. Due to high thermal conductivity, MWCNT is better coolant amongst CuO and water.

Table 6.1 Comparative Properties in between Water and Coolant fluid

Properties	Water	Coolant fluid
Thermal conductivity	low	high
Viscosity	low	high
Density	low	high
Efficiency	low	high
Stability	high	low
Preparation	does not require	required

VIII. ADVANTAGES AND DISADVANTAGES

Advantages

- High heat capacity
- High thermal conductivity
- Reduces the pumping power consumption
- High specific surface area
- High efficiency in heat transfer

Disadvantages

- Chemical stabilizers are required
- Clustering of Coolant particles in Coolant fluids
- Careful handling is required
- Government authorization is required for proper disposal
- Erosion may take place due to solid particles.

IX. FUTURE SCOPE

Further research on a thermal conductivity mechanism of Coolant fluids is focused on theoretical and experimental studies to answer the question of effect of particle size on its conductivity. Researchers are building a structural model that can help to explain the thermal conductivity of Coolant fluids. Another major task is analyzing the microscopic motion in Coolant fluids and understanding their contribution to energy transport. The knowledge of heat transfer at micro and Coolant scale is still limited so further research have more scope. Another main task to known Coolant fluids behaves over time at elevated temperatures. Thermal conductivity is not a critical issue but the mechanism behind this is still unknown to this date. A better understanding of this mechanism can lead to application of these Coolant fluids in engineering for industrial applications. Coolant fluids can be used in HVAC and refrigeration systems, automobile engineering and will apply for machining in production process for cooling and soon where heat transfer is concerned.

REFERENCES

- [1] Nor Azwadi Che Sidik “Recent Advancement of Coolantfluid in engine cooling system” International Journal of Thermal Sciences (2016)
- [2] Aditya choure, Ravibala patil, Kishor dolare, “Performance investigation of automobile radiator using AL₂O₃ asbase Coolantfluid” International Journal of Thermal Sciences (2016)
- [3] D.P. Kulkarni, R.S. Vajjha, D.K. Das, D. Oliva, “Application of aluminum oxide Coolantfluids in diesel electricgenerator as jacket water coolant”, Applied Thermal Engineering 28 (14-15) (2008) 1774- 1781.
- [4] J.A. Eastman, S.U.S. Choi, S. Li, W. Yu, L.J. Thompson, “Anomalously increased effective thermal conductivities of ethylene glycol-based Coolantfluids containing copper Coolantparticles”, Applied Physics Letters 78 (6) (2001) 718-720.
- [5] Y. Hwang, J.K. Lee, C.H. Lee, Y.M. Jung, S.I. Cheong, C.G. Lee, “Stability and thermal conductivity characteristics of Coolantfluids”, Thermochemica Acta 455 (1-2) (2007) 70-74.
- [6] J.-H. Lee, K.S. Hwang, S.P. Jang, B.H. Lee, J.H. Kim, S.U.S. Choi, “Effective viscosities and thermal conductivities of aqueous Coolantfluids containing low volume concentrations of Al₂O₃ Coolantparticles”, International Journal of Heat and Mass Transfer 51 (11-12) (2008) 2651-2656.
- [7] W. Yu, H. Xie, L. Chen, Y. Li, “Investigation of thermal conductivity and viscosity of ethylene glycol based ZnO Coolantfluid”, Thermochemica Acta 491 (1-2) (2009) 92-96.
- [8] H.A. Mintsas, G. Roy, C.T. Nguyen, D. Doucet, “New temperature dependent thermal conductivity data for water-based Coolantfluids”, International Journal of Thermal Sciences 48 (2) (2009) 363-371.
- [9] Navid Bozorgan, Mostafa Mafi and Nariman Bozorgan, “Performance Evaluation of Al₂O₃/Water Coolantfluid as Coolant in a DoubleTube Heat Exchanger Flowing under a Turbulent Flow Regime”, Hindawi Publishing Corporation Advances in Mechanical Engineering Volume 2012, Article ID 891382, 8 pages doi:10.1155/2012/891382.
- [10] P.K. Namburu, D.K. Das, K.M. Tanguturi, R.S. Vajjha, “Numerical study of turbulent flow and heat transfer characteristics of Coolant fluids considering variable properties”, International Journal of Thermal Sciences 48 (2) (2009) 290-302.
- [11] Y. Ding, H. Chen, Y. He, A. Lapkin, M. Yeganeh, L. Siller, “Forced convective heat transfer of Coolant fluids”, Advanced Powder Technology 18 (6) (2007) 813-824.

- [12] H.S. Zeinali, M. Nasr Esfahany, S.G. Etemad, “Experimental investigation of convective heat transfer of Al₂O₃/water Coolant fluid in circular tube”, *International Journal of Heat and Fluid Flow* 28 (2) (2007) 203-210.
- [13] W. Yu, D.M. France, D.S. Smith, D. Singh, E.V. Timofeeva, J.L. Routbort, “Heat transfer to a silicon carbide/water Coolant fluid”, *International Journal of Heat and Mass Transfer* 52 (15-16) (2009) 3606-3612.
- [14] D. Kim, Y. Kwon, Y. Cho, C. Li, S. Cheong, Y. Hwang, “Convective heat transfer characteristics of Coolant fluids under laminar and turbulent flow conditions”, *Current Applied Physics* 9 (2) (2009) e119e-e123.