

Process Optimization of Robotic Arc Welding By Using Taguchi Method on Austenitic Stainless Steel

Hariharavishal R¹, Nagarajaprabhu S², Yuvaraj T³

^{1, 2, 3} Dept of Mechanical Engineering

^{1, 2, 3} Dr. Mahalingam College of Engineering and Technology

Abstract- Manufacturing metal components via robotic welding are a crucial procedure, particularly in heavy sectors like shipbuilding, oil & gas, automotive, and aerospace. Robotic welding is a production process that uses a wide range of diverse approaches, and these operations are always evolving since each advancement might help to prevent welding faults. The primary goal of this publication is to define and review works that show the advances in the main inspection, modelling, monitoring, and automated operations during the welding process in order to avoid, or predictably identify, any possible defect in order to obtain an optimal degree of welding quality. Although a great deal of research work has been carried out in recent years, as a result of which results and reviews have been presented on this subject.

I. INTRODUCTION

Welding is a crucial process in the manufacturing of various products in several industries. However, the quality of a welded joint rest on on several factors, including the welding parameters, material properties, and environmental conditions. Therefore, optimizing these factors is essential for achieving high- quality welds. One of the popular methods for optimizing the welding parameters is the Taguchi method, which is a statistical approach that enables engineers to identify the optimum combination of input parameters that results in the desired output.

II. LITRATURE REVIEW

Joseph I Achebo et al. [2] demonstrated through his work that the Taguchi Method was used to optimise the selection of input parameters, such as welding current, voltage, speed, and time, against the response of the steel's ultimate tensile strength. The Taguchi Method study revealed that a welding current of 240A, a welding time of 2.0 minutes, a welding speed of 0.0062 m/s, and a welding voltage of 33V were the ideal process parameters. These ideal settings were shown to enhance the S/N ratio by 2.32 dB and the UTS by 1.11 times over the baseline process parameters. This study explains how to use the Taguchi Method step by step.

D.S. Nagesh et al. [3] By choosing input parameters like electrode feed rate, arc power, arc voltage, arc current, and arc length, as well as by using the ANN method for optimisation of output parameters like bead height, bead width, depth of penetration, area of penetration, and arc travel rate, weld bead geometry and penetration can be predicted. According to the experimental findings, using preheated plates, a low arc-travel rate, or a high arc-power produced superior fusion. With a rise in arc- travel rate, the bead's height and width both decrease, but the height decrease is more pronounced, resulting in a flatter bead with a greater 27 arc-travel rate. With an increase in electrode feed rate while keeping arc-length fixed, the penetration and HAZ rise.

D. S. Correia et al. [4] proposed was a genetic algorithm (GA)- based method of MIG welding parameter optimisation. Step-by- step, the search for the nearly optimal was conducted, with the GA anticipating the upcoming experiment based on the results of the preceding experiments without knowledge of the modelling equations between the inputs and outputs of the MIG welding process. With only a few number of experiments, the GA was able to produce circumstances that were very close to ideal. But a good setting of its own parameters, such as the number of generations, population size, etc., is necessary for the optimisation by GA approach. Otherwise, there is a chance that the search area will not be sufficiently large.

Wahab H. Khuder et al. [5] Utilising MIG spot welding, researchers have examined the impact of welding process parameters in welding joints between dissimilar metals. In this study, carbon steel and austenitic stainless steel of type AISI 316L were used as the welding base materials. E80S-G is utilised as a filler metal and CO₂ is used as a shielding gas when welding this dissimilar metal. Wire feed, wire feed time, and weld current were used as input parameters in the experiment. By carrying out the experiment, it was possible to estimate how these characteristics would affect the spot's diameter and shear force. They draw the conclusion that whereas shear force decreases with increased welding time, it increases with increasing welding current and spot weld size.

Amit Kumar et al. [6] have worked on improving the MIG welding settings using genetic algorithms (GA) and artificial neural networks (ANN). In this study, a mathematical model is created using the artificial neural network (ANN) method to predict how welding parameters like welding voltage, welding speed, and welding current will affect the final tensile stress during the joining of dissimilar materials such as stainless steel grades 304 and 316. The experiment was conducted using argon as a shielding gas and a full factorial design. The output parameter's value is optimised using the Genetic Algorithm (GA). According to the analysis, the greatest ultimate tensile strength is achieved at 110 A welding current, 18 V welding voltage, and a travel speed of 43.362 cm/min. They've also demonstrated that the Artificial. welding too slowly.

Ajit Hooda et al. [7] have created a response surface model to forecast the tensile strength of an AISI 1040 medium carbon steel joint produced by inert gas metal arc welding. The welding voltage, current, wire speed, and gas flow rate are taken into consideration as input parameters in this study. Face-centered composite design matrix was used to create the experiment. 28 According to the results of the experiment, the welding voltage of 22.5 V, the wire speed of 2.4 m/min, and the gas flow rate of 12 l/min are the best values for process parameters

III. METHODOLOGY

Control of the operating variables in submerged arc welding is essential if high production rates and the welds of good quality are to be obtained.

The following important variables are

1. Welding amperage
2. Gas flow rate
3. Welding time

Welding amperage:

The most significant characteristic is welding current since it impacts deposition rate, regulates the rate of electrode melting, and consequently regulates deposition rate, heat affected zone, depth of penetration, and amount of base metal melted. As welding current increases, penetration and reinforcement also do.

Gas flow rate:

Argon, carbon dioxide, oxygen, nitrogen, hydrogen, and other mixes are among the available welding or shielding gases. The choice of gas is particular to the working metals and impacts production costs, electrode life, weld temperature,

stability, difficulty of welder control, and fluidity, speed, and spatter of the molten weld. Most significantly, it also has an impact on the 30 depth and subsurface profile of the completed weld, as well as its composition, porosity, corrosion resistance, strength, ductility, hardness, and brittleness.

Welding Speed :

The rate at which the welding procedure is carried out, which is commonly measured in units of length per unit of time, is referred to as welding speed. It shows how quickly the joint or workpiece being welded advances through the welding process. Depending on the welding technique, the kind of material being welded, and the particular application, the welding speed can change. The ideal speeds for various welding procedures vary, and they are frequently influenced by elements including heat input, material thickness, joint design, and desired weld quality. In general, a higher welding speed denotes a more expedited welding procedure, which leads to a quicker welding task completion. Finding a balance between speed and quality is crucial, though. Rapid welding may result in insufficient penetration, insufficient fusion, or more flaws. On the other side, excessive heat input, distortion, or burn-through can occur when welding too slowly.

IV. FABRICATION

Austenitic stainless steel grade 304 is a type of corrosion-resistant steel alloy that is widely used in various industries due to its excellent combination of mechanical, physical, and chemical properties. It contains around 18% chromium and 8% nickel, which gives it high corrosion resistance and excellent toughness.

Grade 304 is non-magnetic in its annealed state, making it suitable for applications where magnetic interference is a concern. It also has good weldability, ductility, and formability, which allows it to be easily fabricated into various shapes and sizes using conventional manufacturing processes.

Due to its excellent corrosion resistance, grade 304 is widely used in industries such as food processing, chemical processing, and medical devices. It is also used in architectural and automotive applications, as well as in construction materials such as roofing and cladding.

Overall, Austenitic stainless steel grade 304 is a versatile and reliable material that has a wide range of applications due to its excellent combination of properties.

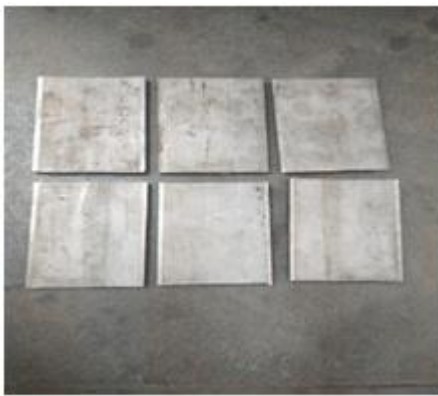


Figure 1 Raw material plate

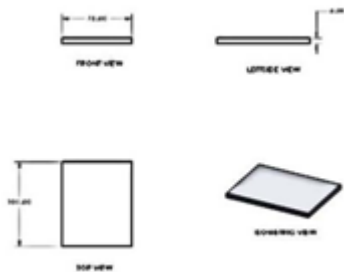


Figure 2 Dimensions of the raw material

Groove making

Groove is a long and narrow indentation built into a material, generally for the purpose of allowing another material or part to move within the groove and be guided by it.(figure)



Figure 3 Portable grinding machines

V Groove making

V-grooves are cut into the matboard by directing bevel cuts to face each other, creating a "V" shape. This cutting exposes the core of the board providing an accent line around the mat opening.(figure)

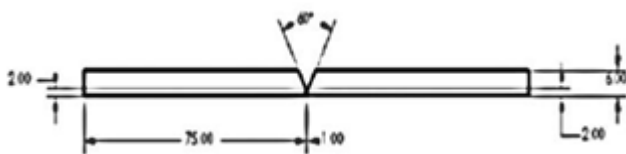


Figure 4 Standard dimensions for V-groove



Figure 5 Raw materials after V-groove

Welding process

Welding is a fabrication process whereby two or more parts are fused together by means of heat, pressure or both forming a joint as the parts cool. Welding is usually used on metals and thermoplastics but can also be used on wood. The completed welded joint may be referred to as a weldment.(figure)



Figure 6 FANUC Robot arc mate 100iC

Taguchi design output:

S.No	Gas flow rate	Current	Welding speed
1	5	130	2
2	5	160	3
3	5	200	4
4	10	130	3
5	10	160	4
6	10	200	2
7	15	130	4
8	15	160	2
9	15	200	3

Welding parameters

Process parameter	Unit	Levels		
		Lower level (1)	Medium level (2)	Upper level (3)
Gas flow rate	(l/m)	5	10	15
Current	(Amp)	130	160	200
Welding speed	(mm/sec)	2	3	4



Figure 7 Raw material after welding

Making of dog bone shape

Dog-bone shaped specimens are recommended for uniaxial tension tests (ASTM D638 2003) in order to reduce the influence of stress concentrations induced by loading grips. The details of recommended specimen dimensions are provided in ASTM D638.(figure)

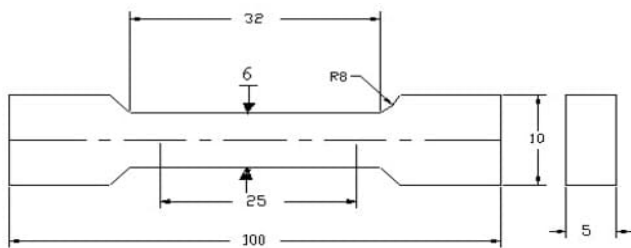


Figure 8 Standard dimension for dog bone shape

V. RESULTS AND DISCUSSION

Destructive testing

Tensile testing

Tensile testing is a destructive test process that provides information about the tensile strength, yield strength, and ductility of the metallic material. It measures the force required to break a composite or plastic specimen and the

extent to which the specimen stretches or elongates to that breaking point.

Tensile Test Results

PLATE NO	TEST PARAMETRES	OBSERVED VALUES
1	Ultimate Tensile Strength (MPa)	464
2	Ultimate Tensile Strength (MPa)	609
3	Ultimate Tensile Strength (MPa)	444
4	Ultimate Tensile Strength (MPa)	351
5	Ultimate Tensile Strength (MPa)	432
6	Ultimate Tensile Strength (MPa)	612
7	Ultimate Tensile Strength (MPa)	484
8	Ultimate Tensile Strength (MPa)	441
9	Ultimate Tensile Strength (MPa)	548

Bending test

A bending test (bending tensile test) is a method of testing materials for their bending strength and other important properties. Destructive materials testing is used for plastics, fiber-reinforced plastics (FRP), metals and ceramic materials. In bending tests, standardized, mostly cylindrical specimens are placed in the center of the checking fixture. The rounded support rollers (bearings) are arranged parallel to each other at a certain distance (support width). The diameter of the cylindrical specimen is proportional to the support width of the bearings. The test punch, which moves down slowly and at a constant speed, loads the sample with increasing force until it breaks or reaches the previously determined deformation. The maximum load exerted during the bending test is called breaking force

Bending test results

Plate no	Length (mm)	Width (mm)	Thickness (mm)	Mandrel diameter (mm)	Angle of bend (deg)	Observation

6	150	19.02	6.42	24	180	No crack found
---	-----	-------	------	----	-----	----------------

VI. ACKNOWLEDEMENT

This project work was supported by Dr Mahalingam college of Engineering and Technology, Pollachi.

REFERANCES

- [1] S. C. Juang and Y. S. Tamg, Process parameters selection for optimizing the weld pool geometry in the tungsten inert gas welding of stainless steel, J. of Materials Processing Technology. Vol. 122, 2002, 33-37(2002)
- [2] Tang YS, Yang WH., Optimization of the weld bead geometry in gas tungsten arc welding by the Taguchi method. Int J Adv Manuf Technol 14: 549-554 (1998).
- [3] K. H., Lee, B. S., Hong, J. K., Son, and Y. H., Han, Optimization of Nd:YAG laser welding process parameters for enclosing ends of titanium tube. J. of Materials Science & Engg. Vol, A415, pp. 149-155 (2006).
- [4] K. L., Pan, C. P., Wang, C. Y., Hsiao and C. K., Ho, Optimization of Nd-YAG laser welding on Mg alloy using Taguchi method, J. of Optics and Laser Tech, Vol. 37, pp. 33-42 (2004)
- [5] I. Z.Ibrahim, et al. The effect of MIG welding parameters on different output parameters. Procedia Engineering 41:1502-1506 (2012)
- [6] S. R. Parmar, and N. Murugan effects of MIG welding parameters on geometry of the weld bead of Stainless steel. J. of Materials Processing Tech, Vol. 41, pp. 381-398 (1994)
- [7] T.Senthil., et al., effect of welding current of TIG welding on tensile properties of AL 6061 alloy. Materials and Design 28; 2080-2092 (2007)
- [8] Sompong, P., Santirat, N., and Sittichai, K., Study of MIG welding affecting physical properties of stainless steel 3041, World Academy of Science, Engg and Technology: 61:402–405 (2012)
- [9] Bandyopadhyay A. Datta S. PK Pal, Grey-based Taguchi technique for optimization of weld bead geometry in submerged arc welding, Int J Adv Manuf Tech 39:1136-1143 (2008)